

2SD1263, 2SD1263A

Silicon NPN triple diffusion planar type


For power amplification

Features

- High collector to base voltage V_{CBO}
- Full-pack package which can be installed to the heat sink with one screw

Absolute Maximum Ratings ($T_C=25^\circ\text{C}$)

Parameter	Symbol	Ratings	Unit	
Collector to base voltage	2SD1263	350	V	
	2SD1263A	400		
Collector to emitter voltage	2SD1263	250	V	
	2SD1263A	300		
Emitter to base voltage	V_{EBO}	5	V	
Peak collector current	I_{CP}	1.5	A	
Collector current	I_C	0.75	A	
Collector power dissipation	P_C	$T_C=25^\circ\text{C}$	35	W
		$T_a=25^\circ\text{C}$	2	
Junction temperature	T_j	150	$^\circ\text{C}$	
Storage temperature	T_{stg}	-55 to +150	$^\circ\text{C}$	

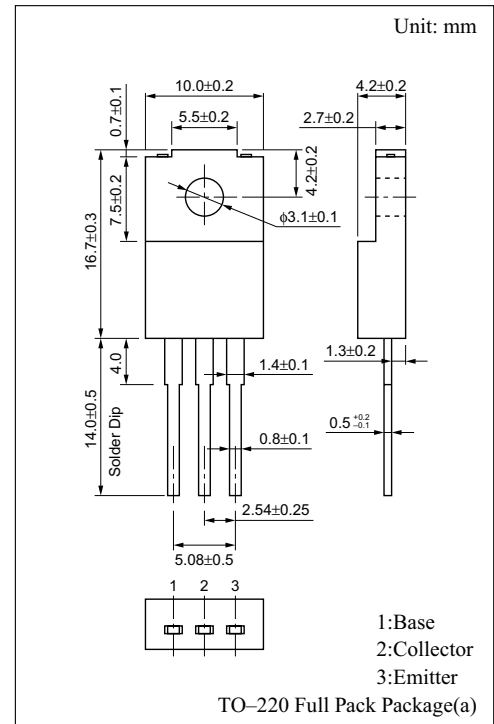


Electrical Characteristics ($T_C=25^\circ\text{C}$)

Parameter	Symbol	Conditions	min	typ	max	Unit
Collector cutoff current	2SD1263	$V_{CE} = 350\text{V}, V_{BE} = 0$			1	mA
	2SD1263A					
Collector cutoff current	2SD1263	$V_{CE} = 150\text{V}, I_B = 0$			1	mA
	2SD1263A					
Emitter cutoff current	I_{EBO}	$V_{EB} = 5\text{V}, I_C = 0$			1	mA
Collector to emitter voltage	2SD1263	$I_C = 30\text{mA}, I_B = 0$	250			V
	2SD1263A					
Forward current transfer ratio	h_{FE1}^*	$V_{CE} = 10\text{V}, I_C = 0.3\text{A}$	70		250	
	h_{FE2}	$V_{CE} = 10\text{V}, I_C = 1\text{A}$	10			
Base to emitter voltage	V_{BE}	$V_{CE} = 10\text{V}, I_C = 1\text{A}$			1.5	V
Collector to emitter saturation voltage	$V_{CE(sat)}$	$I_C = 1\text{A}, I_B = 0.2\text{A}$			1	V
Transition frequency	f_T	$V_{CE} = 5\text{V}, I_C = 0.5\text{A}, f = 10\text{MHz}$		30		MHz
Turn-on time	t_{on}	$I_C = 1\text{A}, I_{B1} = 0.1\text{A}, I_{B2} = -0.1\text{A}, V_{CC} = 50\text{V}$		0.5		μs
Storage time	t_{stg}			2		μs
Fall time	t_f			0.5		μs


* h_{FE1} Rank classification

Rank	Q	P
h_{FE1}	70 to 150	120 to 250


$P_C - T_a$

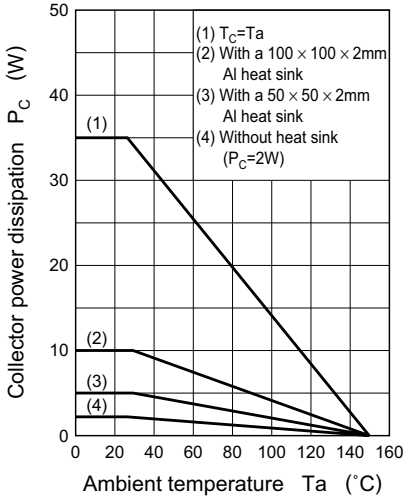


$I_C - V_{CE}$

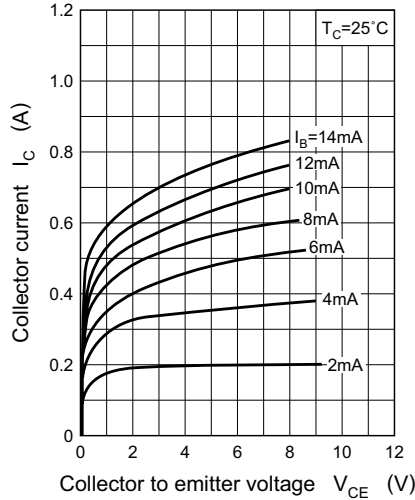


$I_C - V_{BE}$

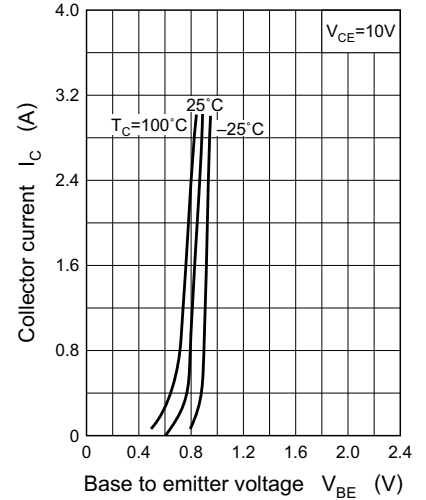


$V_{CE(sat)} - I_C$

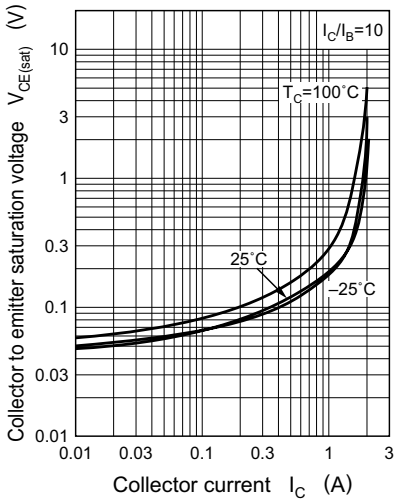


$h_{FE} - I_C$

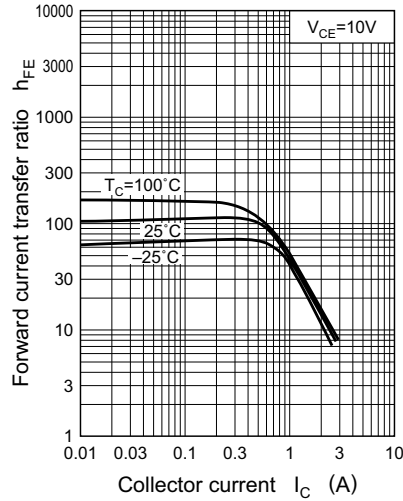

$f_T - I_C$

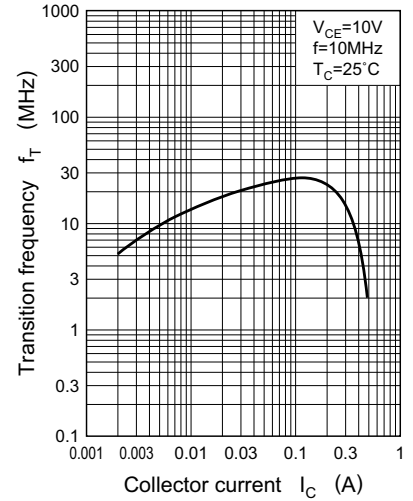

Area of safe operation (ASO)

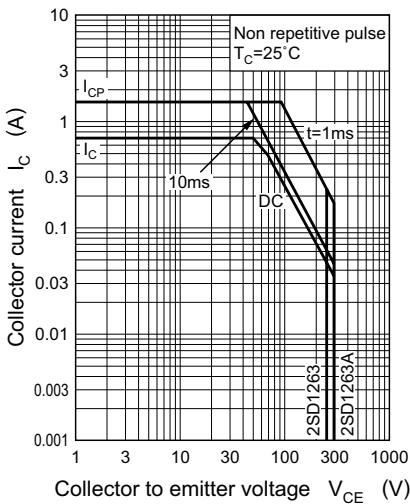

$R_{th(t)} - t$

