

Silicon NPN Power Transistors

2SC4517 2SC4517A

DESCRIPTION

- With TO-220F package
- High voltage switching transistor

APPLICATIONS

- For switching regulator and general purpose applications

PINNING

PIN	DESCRIPTION
1	Base
2	Collector
3	Emitter

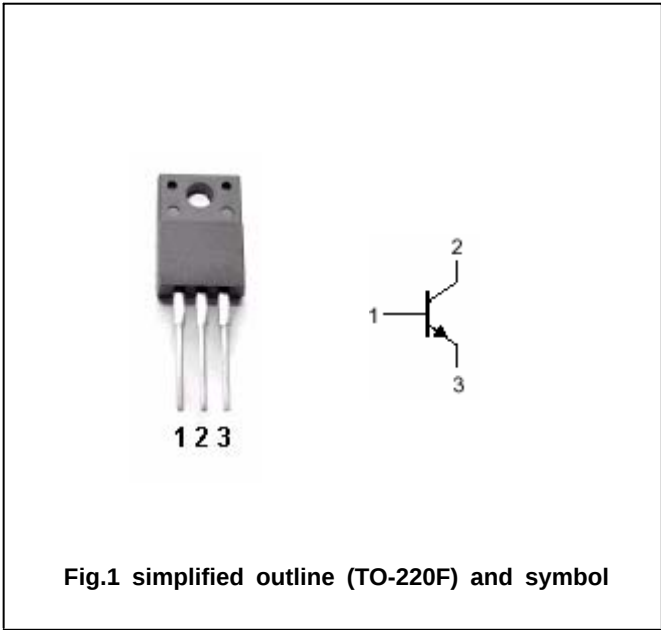


Fig.1 simplified outline (TO-220F) and symbol

Absolute maximum ratings (Ta=25)

SYMBOL	PARAMETER	CONDITIONS	VALUE	UNIT
V _{CBO}	Collector-base voltage	Open emitter	900	V
			1000	
V _{CEO}	Collector-emitter voltage	Open base	550	V
V _{EBO}	Emitter-base voltage	Open collector	7	V
I _C	Collector current		3	A
I _{CM}	Collector current-pulse		6	A
I _B	Base current		1.5	A
P _C	Collector power dissipation	T _C =25	30	W
T _j	Junction temperature		150	
T _{stg}	Storage temperature		-55~150	

Silicon NPN Power Transistors

2SC4517 2SC4517A

CHARACTERISTICS

Tj=25 unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP.	MAX	UNIT
$V_{(BR)CEO}$	Collector-emitter breakdown voltage	$I_C=10mA$; $I_B=0$	550			V
V_{CEsat}	Collector-emitter saturation voltage	$I_C=1A$; $I_B=0.2A$			0.5	V
V_{BEsat}	Base-emitter saturation voltage	$I_C=1A$; $I_B=0.2A$			1.2	V
I_{CBO}	Collector cut-off current	$V_{CB}=800V$; $I_E=0$			100	μA
I_{EBO}	Emitter cut-off current	$V_{EB}=7V$; $I_C=0$			100	μA
h_{FE}	DC current gain	$I_C=1A$; $V_{CE}=4V$	10		30	
C_{OB}	Output capacitance	$I_E=0$; $V_{CB}=10V$; $f=1MHz$		35		pF
f_T	Transition frequency	$I_E=-0.25A$; $V_{CE}=12V$		6		MHz

Switching times

t_{on}	Turn-on time	$I_C=1.0A$ $I_{B1}=0.15A$ $I_{B2}=-0.45A$ $V_{CC}=250V$, $R_L=250\Omega$			0.7	μs
t_s	Storage time				4.0	μs
t_f	Fall time				0.5	μs

Silicon NPN Power Transistors

2SC4517 2SC4517A

PACKAGE OUTLINE

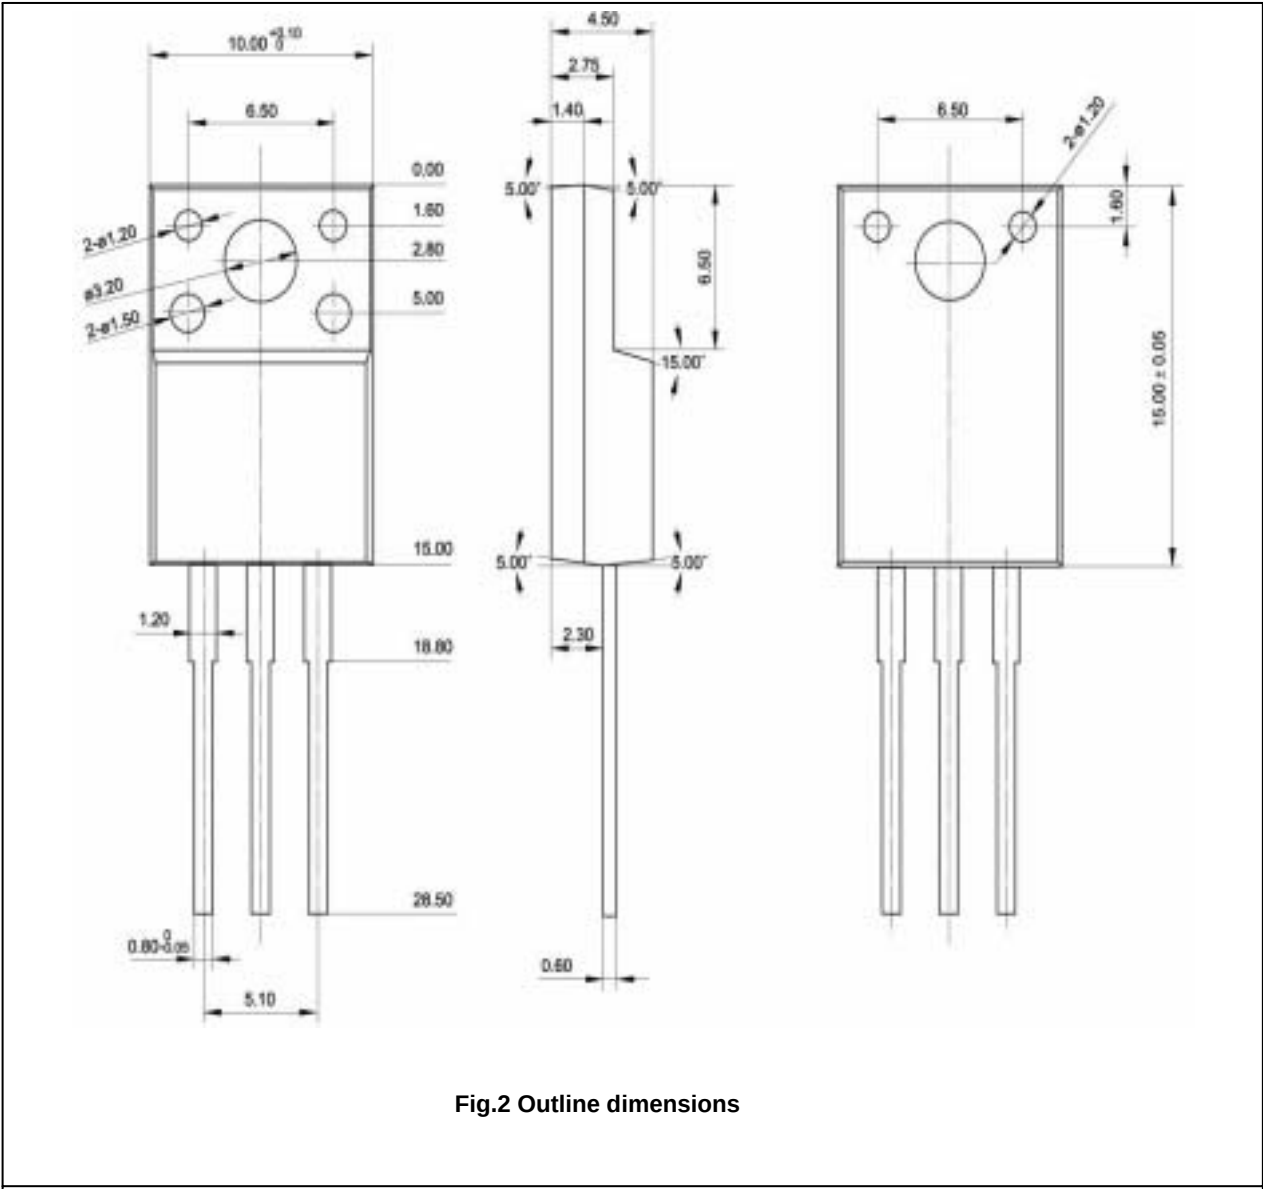


Fig.2 Outline dimensions

Silicon NPN Power Transistors

2SC4517 2SC4517A

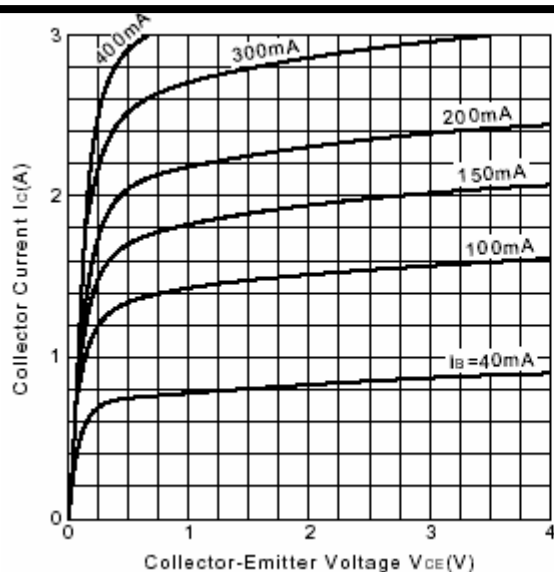


Fig.3 Static Characteristic

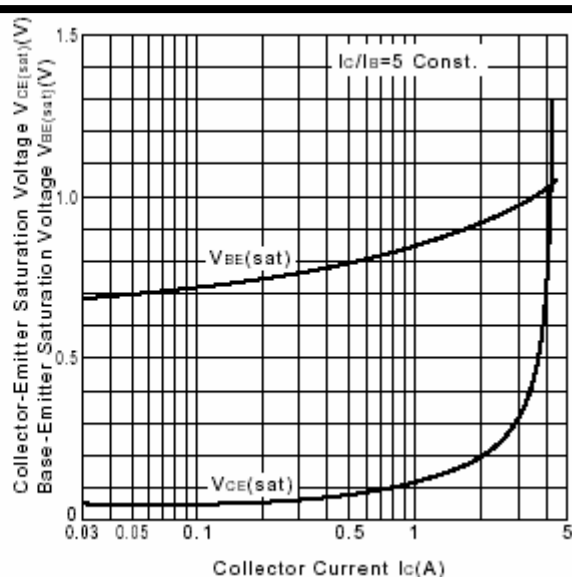
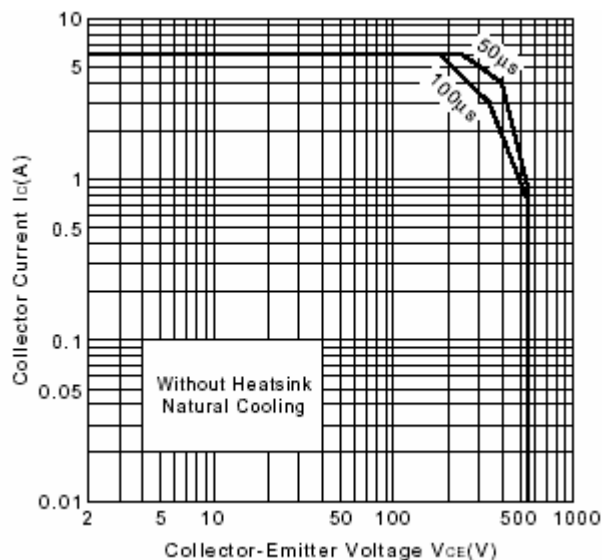
Fig.4 Base-Emitter Saturation Voltage
Collector-Emitter Saturation Voltage

Fig.5 Safe Operating Area

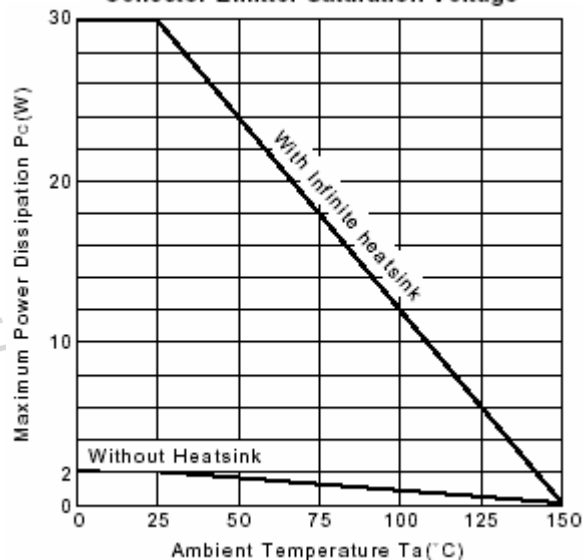
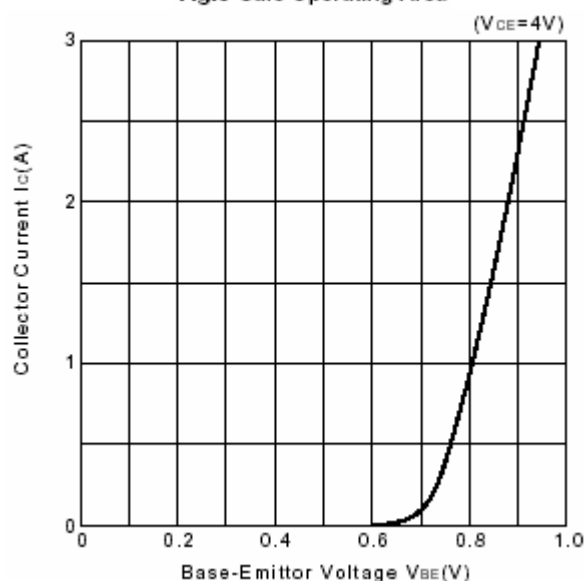
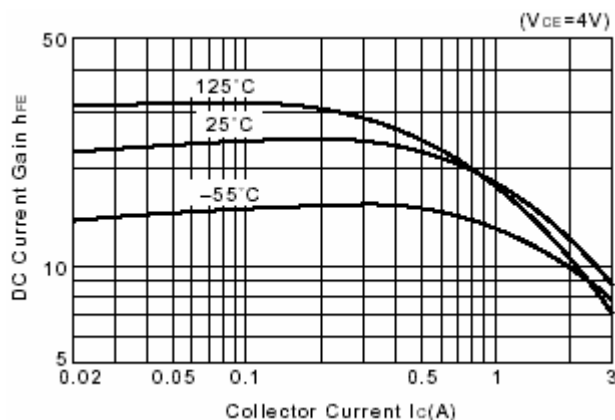
Fig.6 P_C - T_a DeratingFig.7 I_C - V_{BE} 

Fig.8 DC current Gain