

Silicon PNP Power Transistors

MJ15027

DESCRIPTION

- With TO-3 package
- Complement to type MJ15026
- Excellent safe operating area

APPLICATIONS

- For high power audio ,stepping motor and other linear applications
- Relay or solenoid drivers
- DC-DC converters inverters

PINNING(see Fig.2)

PIN	DESCRIPTION
1	Base
2	Emitter
3	Collector

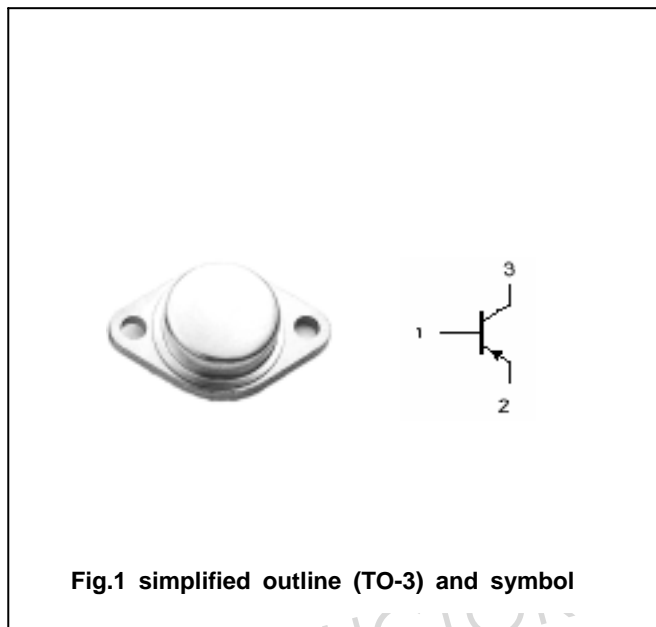


Fig.1 simplified outline (TO-3) and symbol

Absolute maximum ratings(Ta=)

SYMBOL	PARAMETER	CONDITIONS	VALUE	UNIT
V _{CBO}	Collector-base voltage	Open emitter	-200	V
V _{CEO}	Collector-emitter voltage	Open base	-200	V
V _{EBO}	Emitter-base voltage	Open collector	-7	V
I _C	Collector current		-15	A
I _B	Base current		-7	A
P _C	Collector power dissipation	T _C =25	250	W
T _j	Junction temperature		175	
T _{stg}	Storage temperature		-65~175	

THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	MAX	UNIT
R _{th j-c}	Thermal resistance junction to case	0.98	/W

Silicon PNP Power Transistors

MJ15027

CHARACTERISTICS

T_j=25 unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP.	MAX	UNIT
V _{(BR)CEO}	Collector-emitter breakdown voltage	I _C =-50mA ; I _B =0	-200			V
V _{EBO}	Emitter-base breakdown voltage	I _E =-1mA ; I _C =0	-7			V
V _{CEsat}	Collector-emitter saturation voltage	I _C =-10A ; I _B =-1A			-2.0	V
V _{BE}	Base-emitter on voltage	I _C =-5A ; V _{CE} =-5V			-1.5	V
I _{CBO}	Collector cut-off current	V _{CB} =-200V ; I _E =0			-0.1	mA
I _{EBO}	Emitter cut-off current	V _{EB} =-7V ; I _C =0			-0.1	mA
h _{FE}	DC current gain	I _C =-5A ; V _{CE} =-5V	25		150	
f _T	Transition frequency	I _C =-0.5A ; V _{CE} =-12V	15			MHz

固电半导体
INCHANGE SEMICONDUCTOR

PACKAGE OUTLINE

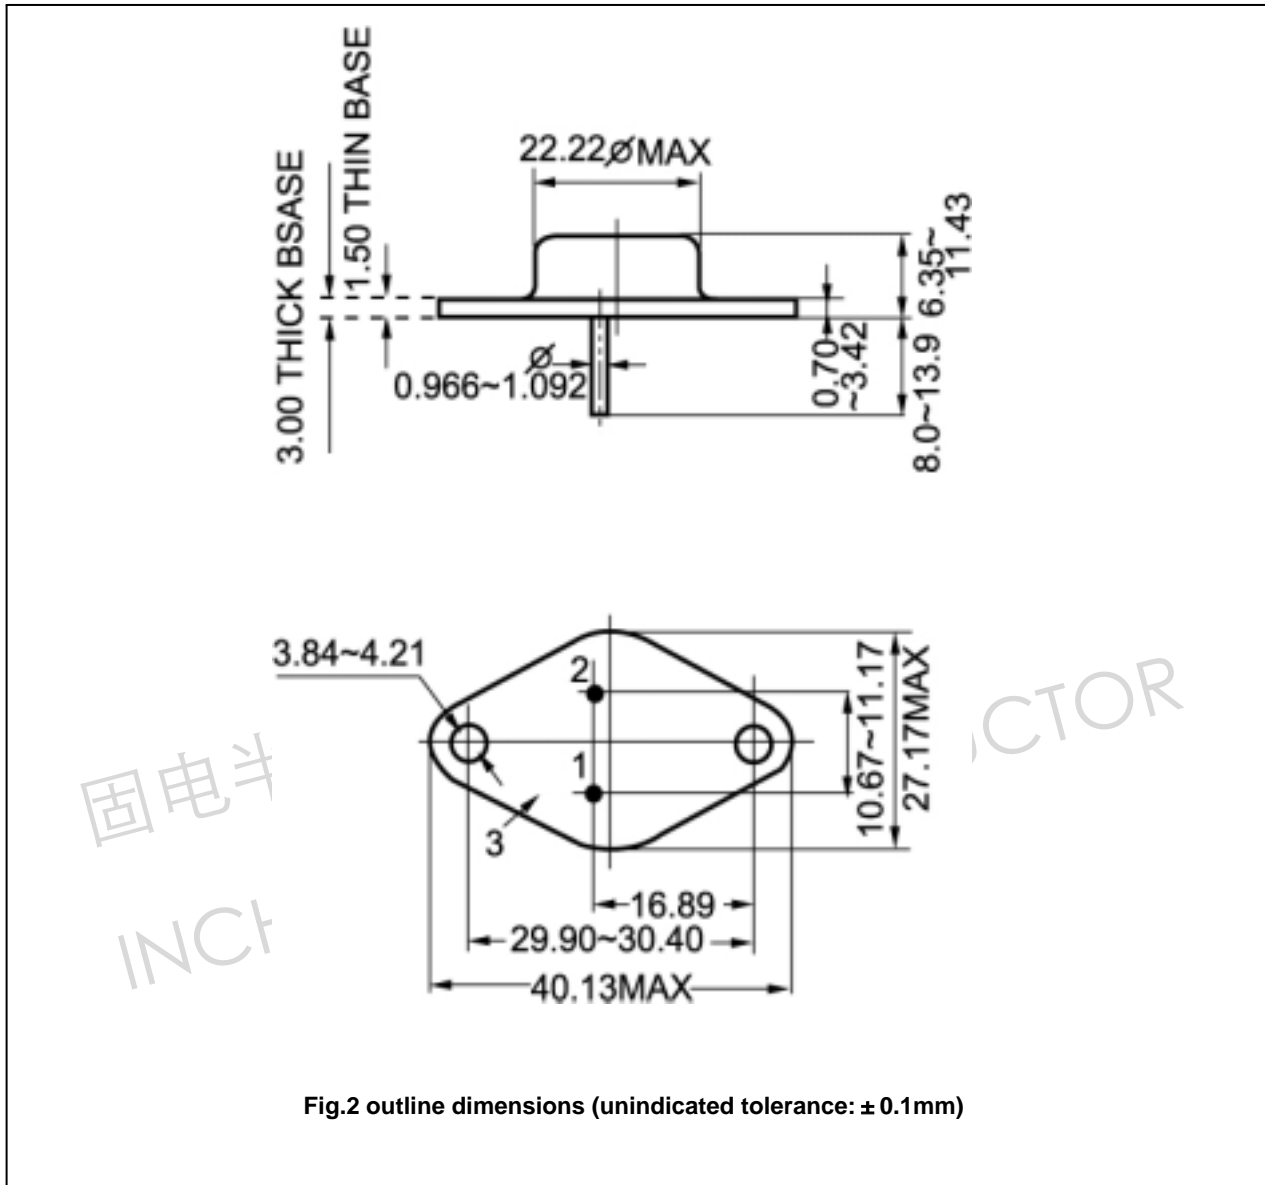


Fig.2 outline dimensions (unindicated tolerance: $\pm 0.1\text{mm}$)