

HA13117

T-74-05-01

14 W BTL Audio Power Amplifier

At 13.2 V to 4 Ω load, the HA13117 provides an output power of 14 W with 10 % distortion. It is easy to design as this IC employs internal each protection circuit and the new small package.


Features

- Low external components count
- Small outline package, easy to mount
- Internal each protection circuits
 - Surge protection circuit
 - Thermal shut-down circuit
 - Ground fault protection circuit
 - Power supply fault protection circuit.

Ordering Information

| Type No. | Package |
|----------|---------|
| HA13117 | SP-15 |

Typical Application Circuit

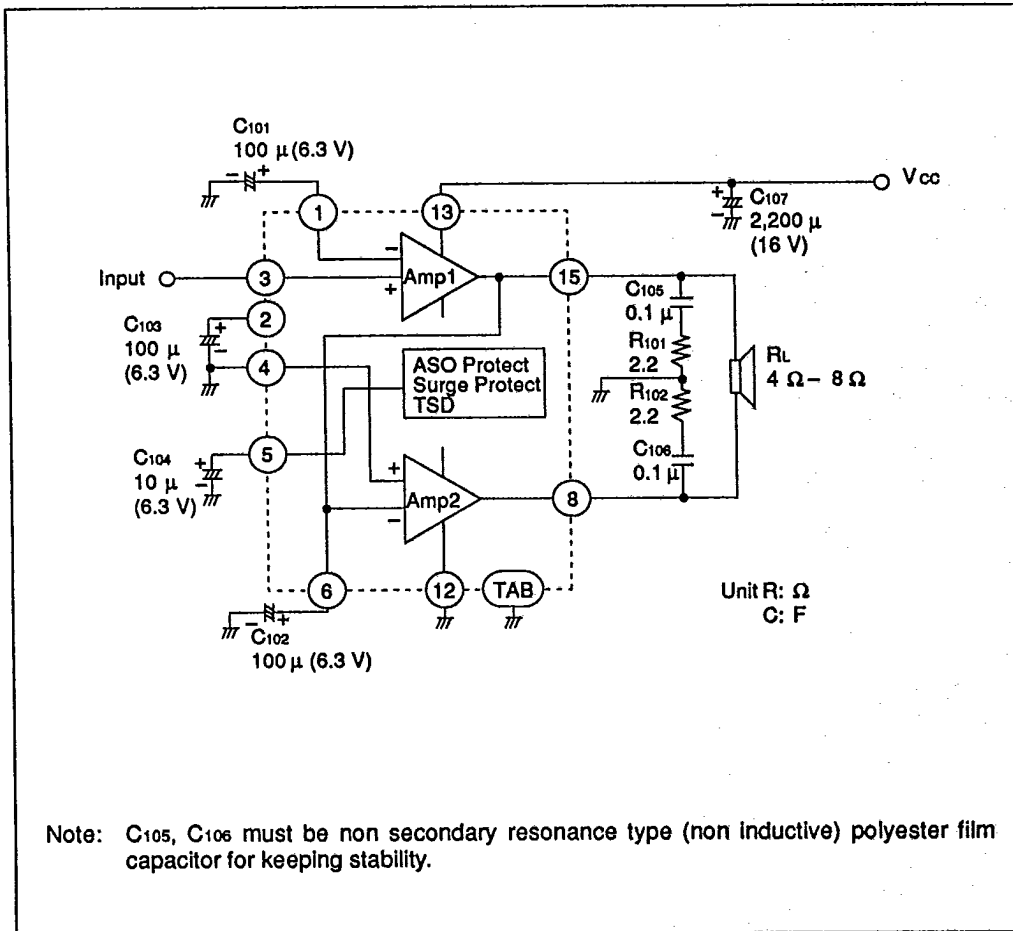

HA13117

T-74-05-01

Table 1 Absolute Maximum Ratings (Ta = 25 °C)


| Item | Symbol | Rating | Unit | Notes |
|--------------------------|----------------|-------------|------|-------|
| Operating supply voltage | Vcc | 18 | V | |
| DC supply voltage | Vcc (DC) | 26 | V | 1 |
| Peak supply voltage | Vcc (peak) | 50 | V | 2 |
| Output current | Io (peak) | 4 | A | |
| Power dissipation | PT | 15 | W | |
| Thermal resistance | θ_{j-c} | 3.5 | °C/W | |
| Junction temperature | Tj | 150 | °C | |
| Operating temperature | Topr | -30 to +80 | °C | |
| Storage temperature | Tstg | -55 to +125 | °C | |

Notes: 1. Value at t = 30 sec.
 2. Value at width tw = 200 ms and rise time tr = 1 ms.


Table 2 Electrical Characteristics (Vcc = 13.2 V, f = 1 kHz, RL = 4 Ω, Ta = 25 °C)

| Item | Symbol | Min | Typ | Max | Unit | Test conditions |
|--------------------------------|--------------|-----|-----|-----|------|-------------------------------------|
| Quiescent current | Io | 40 | 80 | 160 | mA | Vin = 0 |
| Input bias voltage | Vb | — | 20 | 40 | mV | Vin = 0 |
| Output offset voltage | ΔV_o | — | — | 330 | mV | Vin = 0 |
| Voltage gain | Gv | 53 | 55 | 57 | dB | Vin = -55 dBm |
| Output power | Pout | 10 | 14 | — | W | THD = 10 % RL = 4 Ω |
| | | — | 7 | — | | |
| Total harmonic distortion | THD | — | 0.2 | 1.0 | % | Pout = 1.5 W |
| Output noise voltage | WBN | — | 1.0 | 2.0 | mV | Rg = 10 kΩ, BW = 20 Hz to 20 kHz |
| Supply voltage rejection ratio | SVR | 33 | 44 | — | dB | f = 500 Hz |
| Input resistance | Rin | 20 | 30 | 40 | kΩ | |
| Rolloff frequency | fL | — | 20 | — | Hz | $\Delta G_v = -3$ dB Low |
| | fH | 10 | 20 | 40 | kHz | from f = 1 kHz Ref. High |



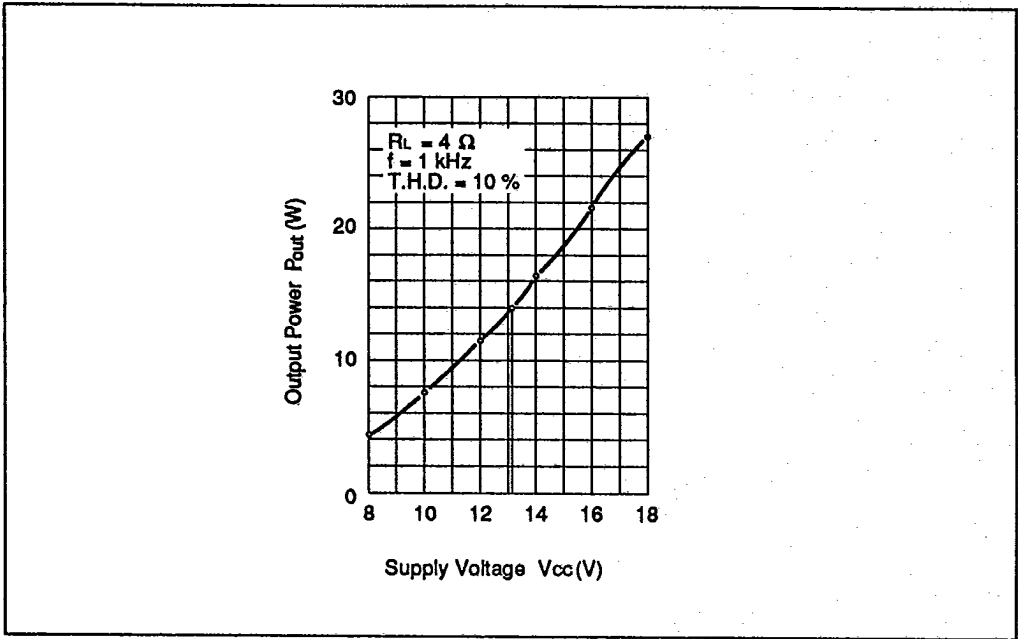

Output Power vs. Supply Voltage

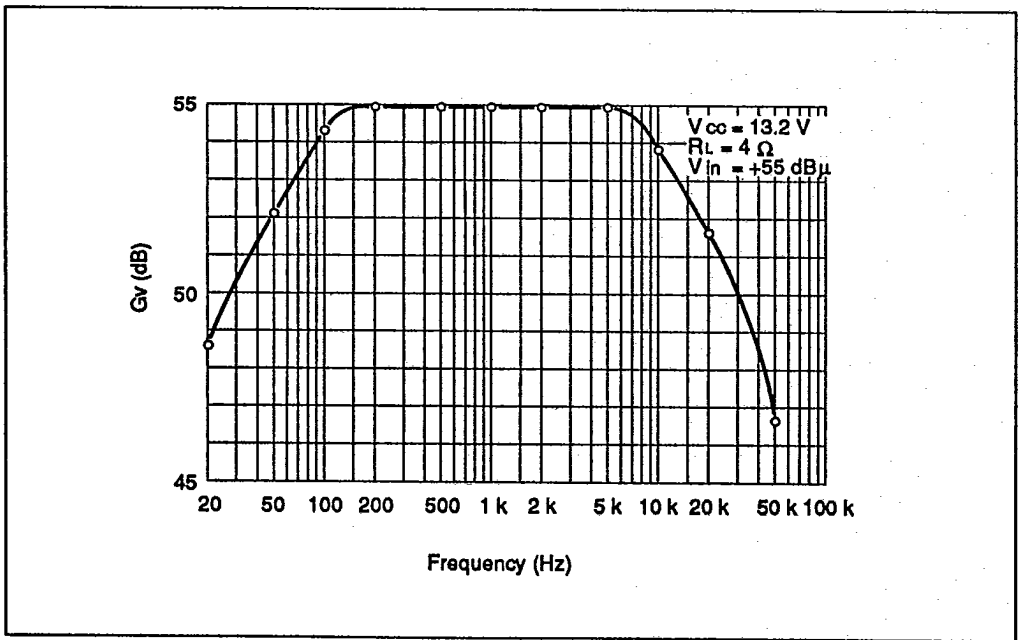


Voltage Gain vs. Frequency




HA13117

T-74-05-01

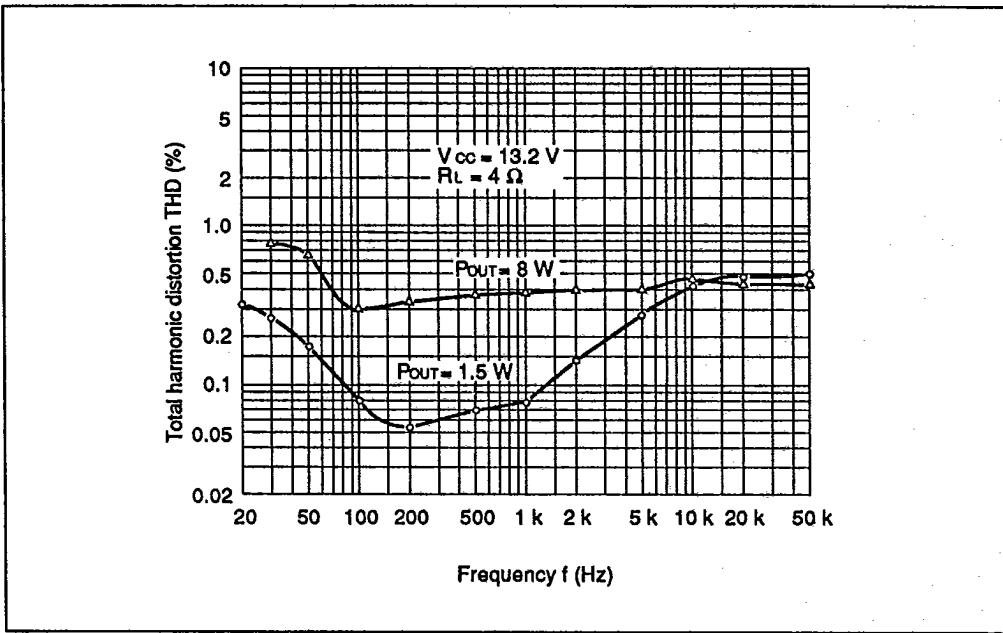

Total Harmonic Distortion vs. Frequency

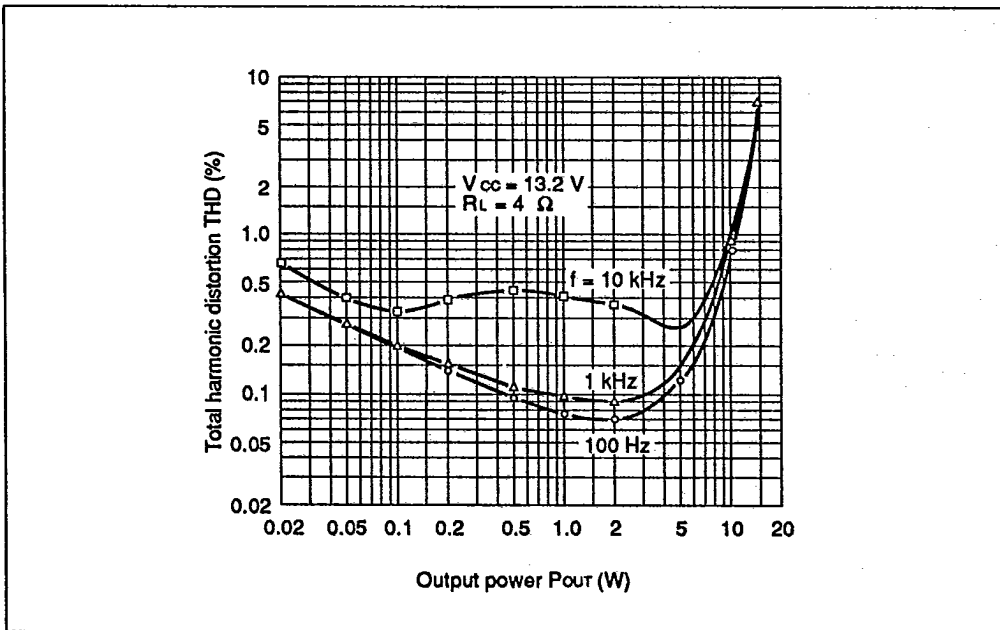


Total Harmonic Distortion vs. Output Power




T-74-05-01

HA13117

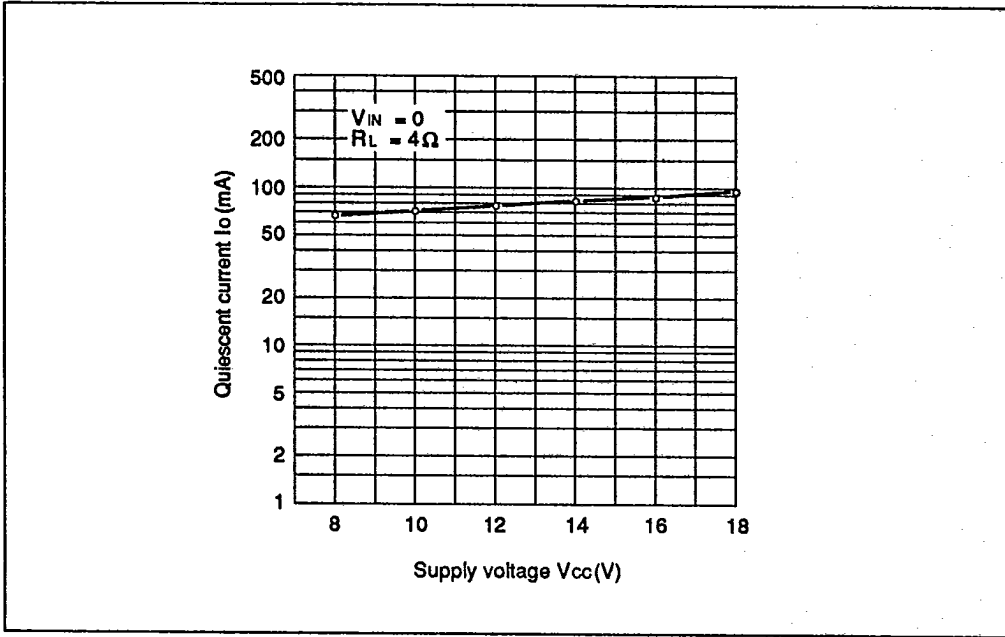

Quiescent Current vs. Supply Voltage

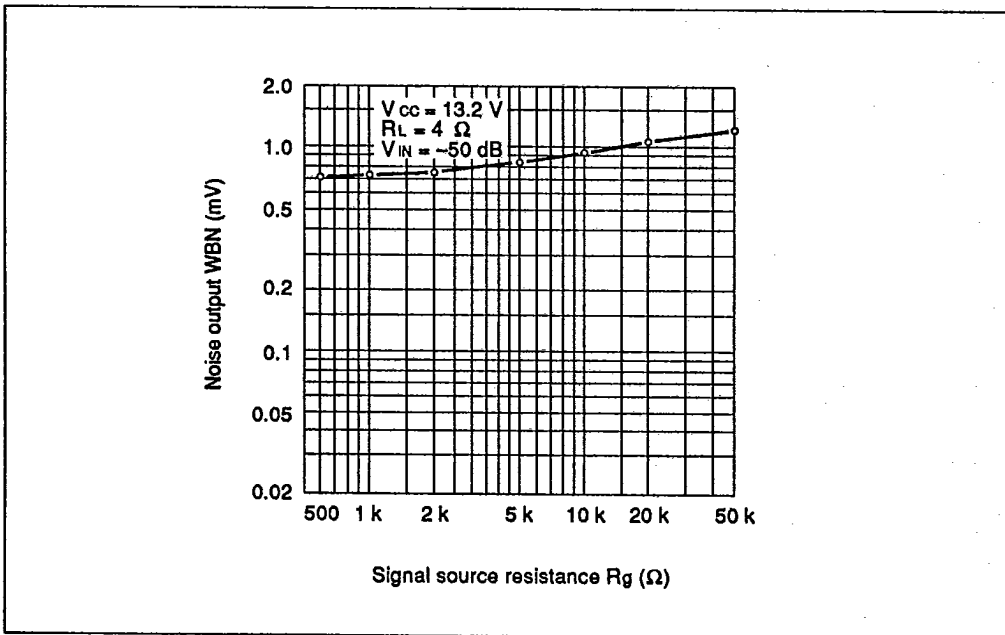


Noise Output vs. Signal Source Resistance



HA13117

T-74-05-01

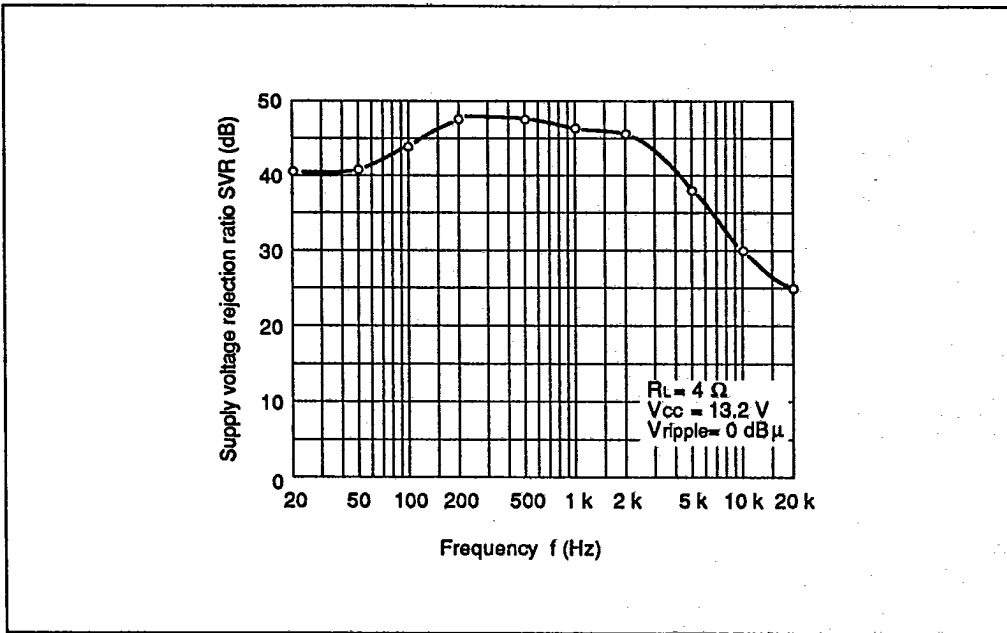

Supply Voltage Rejection Ratio vs. Frequency

