

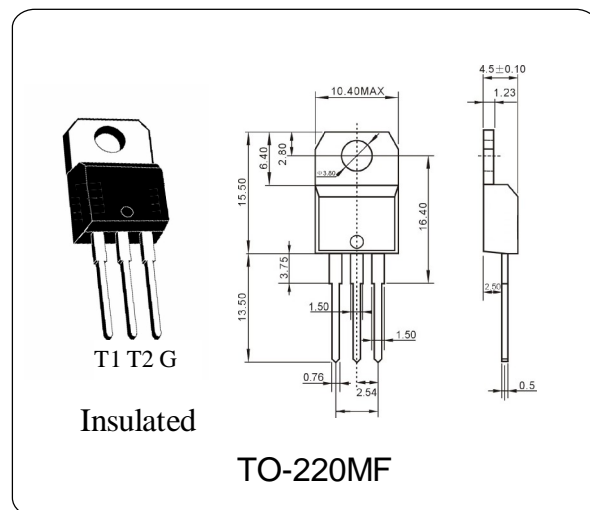
**6.0A TRIACS**
**BTA06-800C**
**GENERAL DESCRIPTION**

Suitable for AC switching operations, the BTA/BTB06 series can be used as an ON/OFF function in applications such as static relays, heating regulation, induction motor starting circuits... or for phase control in light dimmers, motor speed controllers...

The snubberless and logic level versions (BTA/BTB...W) are specially recommended for use on inductive loads, thanks to their high commutation performances. By using an internal ceramic pad, the BTA series provides voltage insulated tab (rated at 2500V RMS) complying with UL standards

**ABSOLUTE MAXIMUM RATINGS ( Ta = 25 °C)**

PARAMETER	Symbol	Value	Unit
Repetitive peak off-state voltages	$V_{DRM}$	800	V
peak off-state reverse voltages	$V_{RRM}$	800	V
RMS on-state current	$I_T$	6.0	A
Non-repetitive peak on-state current	$I_{TSM}$	60	A
Max. Operating Junction Temperature	$T_j$	110	°C
Storage Temperature	$T_{stg}$	-45~150	°C


**ELECTRICAL CHARACTERISTICS ( Ta = 25 °C)**

PARAMETER		Symbol	Test Conditions	Min.	Max	Unit
Repetitive peak off-state voltages		$V_{DRM}$	$I_D=0.1mA$	800	—	V
Repetitive peak off-state current		$I_{DRM}$	$V_{DRM}=600V$	—	10	uA
On-state voltage		$V_{TM}$	$I_T=5.5A$	—	1.55	V
Holding current		$I_H$	$I_T=0.1A$	—	50	mA
Gate trigger Current	T2+G+	$I_{GT}$	$V_{AK}=12V, R_L=30\Omega$	—	20	mA
	T2+G-			—	35	
	T2-G-			—	35	
	T2-G+			—	100	
Gate trigger Voltage	T2+G+	$V_{GT}$	$V_D=12V, R_L=30\Omega$	—	1.3	V
	T2+G-			—	1.3	
	T2-G-			—	1.3	