

Silicon NPN Power Transistors

BUX41

DESCRIPTION

- With TO-3 package
- Fast switching times

APPLICATIONS

- For high speed ,high current and high power applications

PINNING(see fig.2)

PIN	DESCRIPTION
1	Base
2	Emitter
3	Collector

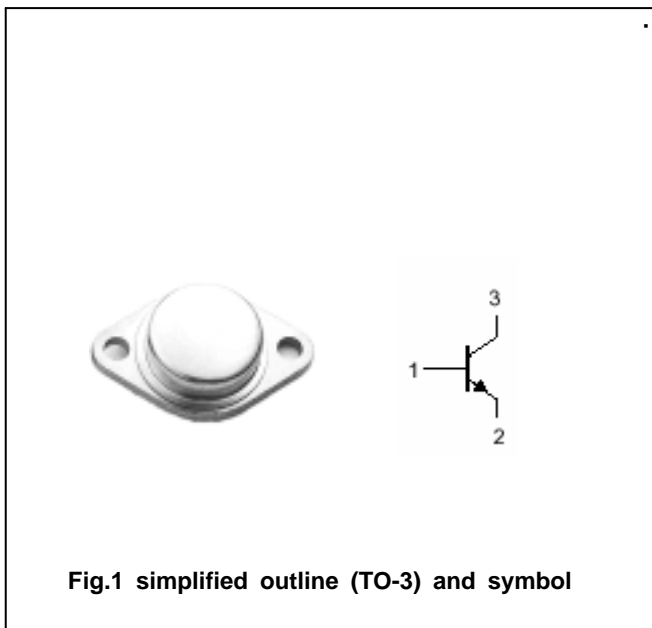


Fig.1 simplified outline (TO-3) and symbol

ABSOLUTE MAXIMUM RATINGS(Ta=25 )

SYMBOL	PARAMETER	CONDITIONS	VALUE	UNIT
$V_{CBO}$	Collector-base voltage	Open emitter	250	V
$V_{CEO}$	Collector-emitter voltage	Open base	200	V
$V_{EBO}$	Emitter-base voltage	Open collector	7	V
$I_C$	Collector current		15	A
$I_{CM}$	Collector current-peak		20	A
$I_B$	Base current		3	A
$P_T$	Total power dissipation	$T_C=25$	120	W
$T_j$	Junction temperature		200	
$T_{stg}$	Storage temperature		-65~200	

THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	MAX	UNIT
$R_{th\ j-c}$	Thermal resistance junction to case	1.46	/W

## Silicon NPN Power Transistors

## BUX41

## CHARACTERISTICS

T<sub>j</sub>=25 unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP.	MAX	UNIT
V <sub>CE0(SUS)</sub>	Collector-emitter sustaining voltage	I <sub>C</sub> =0.2A; I <sub>B</sub> =0; L=25mH	200			V
V <sub>(BR)EBO</sub>	Emitter-base sustaining voltage	I <sub>E</sub> =50mA; I <sub>C</sub> =0	7			V
V <sub>CEsat-1</sub>	Collector-emitter saturation voltage	I <sub>C</sub> =5 A; I <sub>B</sub> =0.5 A			1.2	V
V <sub>CEsat-2</sub>	Collector-emitter saturation voltage	I <sub>C</sub> =8 A; I <sub>B</sub> =1 A			1.6	V
V <sub>BEsat</sub>	Base-emitter saturation voltage	I <sub>C</sub> =8 A; I <sub>B</sub> =1 A			2.0	V
I <sub>CEX</sub>	Collector cut-off current	V <sub>CE</sub> =250V; V <sub>BE</sub> =-1.5V T <sub>C</sub> =125			1.0 5.0	mA
I <sub>CEO</sub>	Collector cut-off current	V <sub>CE</sub> =160V; I <sub>B</sub> =0			1.0	mA
I <sub>EBO</sub>	Emitter cut-off current	V <sub>EB</sub> =5V; I <sub>C</sub> =0			1.0	mA
h <sub>FE-1</sub>	DC current gain	I <sub>C</sub> =5A ; V <sub>CE</sub> =4V	15		45	
h <sub>FE-2</sub>	DC current gain	I <sub>C</sub> =8A ; V <sub>CE</sub> =4V	8			
f <sub>T</sub>	Transition frequency	I <sub>C</sub> =1A ; V <sub>CE</sub> =15V; f=4MHz	8.0			MHz

## Switching times

t <sub>on</sub>	Turn-on time	I <sub>C</sub> =8A ; I <sub>B1</sub> =-I <sub>B2</sub> =1A V <sub>CC</sub> =150V, R <sub>C</sub> =18.75			0.6	μs
t <sub>s</sub>	Storage time				1.5	μs
t <sub>f</sub>	Fall time				0.4	μs

Silicon NPN Power Transistors

BUX41

PACKAGE OUTLINE

