

2SD1641

Silicon PNP Triple-Diffused Planar Type

High DC Current Gain (h_{FE}), High Power Amplifier
TV Power Source Output


■ Features

- Wide area of safety operation (ASO)
- Protective avalanche diode built-in
- High DC current gain (h_{FE})
- Good linearity of DC current gain (h_{FE})


■ Absolute Maximum Ratings (Tc=25°C)

Item	Symbol	Value	Unit
Collector-base voltage	V_{CB0}	$55 \pm \frac{15}{10}$	V
Collector-emitter voltage	V_{CE0}	$55 \pm \frac{15}{10}$	V
Emitter-base voltage	V_{EB0}	5	V
Peak collector current	I_{CP}	20	A
Collector current	I_C	4	A
Collector power dissipation	P_C	Tc=25 °C	80
		Ta=25 °C	2.5
Junction temperature	T_J	150	°C
Storage temperature	T_{stg}	-55 ~ +150	°C

■ Package Dimensions

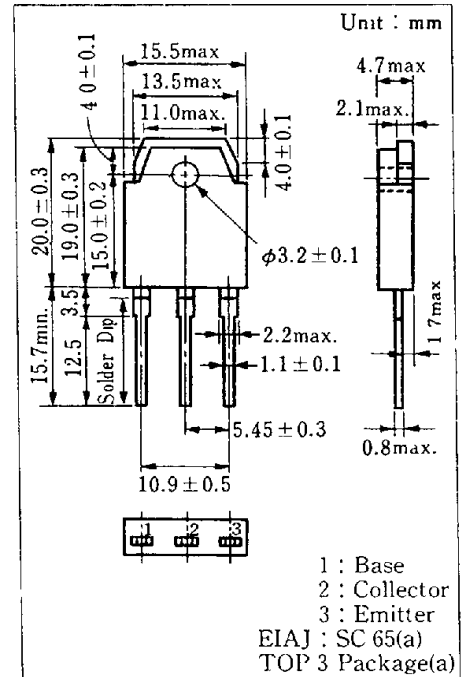

■ Inner Circuit

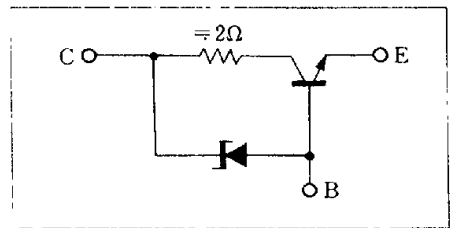

■ Electrical Characteristics (Tc=25°C)

Item	Symbol	Condition	min	typ	max	Unit
Collector cutoff current	I_{CBO}	$V_{CB} = 30V, I_E = 0$			100	μA
Emitter cutoff current	I_{EBO}	$V_{EB} = 5V, I_C = 0$			10	μA
Collector-base voltage	V_{CB0}	$I_C = 10mA, I_E = 0$	45		70	V
Collector-emitter voltage	V_{CE0}	$I_C = 100mA, I_B = 0$	45		70	V
DC current gain	h_{FE}	$V_{CE} = 5V, I_C = 0.5A$	500		2500	
Collector-emitter saturation voltage	$V_{CE(sat)1}$	$I_C = 0.5A, I_B = 2mA$			2	V
Base-emitter saturation voltage	$V_{CE(sat)2}$	$I_C = 1A, I_B = 20mA$			3	V
Base voltage	V_{BE}	$V_{CE} = 5V, I_C = 0.5A$			0.8	V
Transition frequency	f_T	$V_{CE} = 10V, I_C = 0.5A, f = 10MHz$		45		MHz

6932852 0016784 552

