

## H7818 Three-terminal positive voltage regulator

### FEATURES


Maximum Output current  $I_{OM}$ : 1.5 A

Output voltage  $V_o$ : 18 V

Continuous total dissipation

$P_D$ : 2 W ( $T_a = 25^\circ\text{C}$ )

15 W ( $T_C = 25^\circ\text{C}$ )

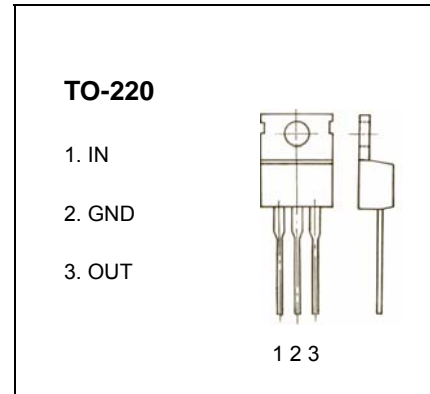


### ABSOLUTE MAXIMUM RATINGS (Operating temperature range applies unless otherwise specified)

Parameter	Symbol	Value	Unit
Input Voltage	$V_i$	35	V
Thermal resistance junction-air	$R_{\theta JA}$	65	$^\circ\text{C/W}$
Thermal resistance junction-cases	$R_{\theta JC}$	5	$^\circ\text{C/W}$
Operating Junction Temperature Range	$T_{OPR}$	0-125	$^\circ\text{C}$
Storage Temperature Range	$T_{STG}$	-65-150	$^\circ\text{C}$

### ELECTRICAL CHARACTERISTICS ( $V_i=27\text{V}$ , $I_o=500\text{mA}$ , $C_i=0.33\mu\text{F}$ , $C_o=0.1\mu\text{F}$ , unless otherwise specified)

Parameter	Symbol	Test conditions	MIN	TYP	MAX	UNIT	
Output voltage	$V_o$		25 $^\circ\text{C}$	17.3	18	18.7	V
		$21\text{V} \leq V_i \leq 33\text{V}$ , $I_o=5\text{mA}-1\text{A}$ $P \leq 15\text{W}$	0-125 $^\circ\text{C}$	17.1	18	18.9	V
Load Regulation	$\Delta V_o$	$I_o=5\text{mA}-1.5\text{A}$	25 $^\circ\text{C}$		12	360	mV
		$I_o=250\text{mA}-750\text{mA}$	25 $^\circ\text{C}$		4	180	mV
Line regulation	$\Delta V_o$	$21\text{V} \leq V_i \leq 33\text{V}$	25 $^\circ\text{C}$		15	360	mV
		$24\text{V} \leq V_i \leq 30\text{V}$	25 $^\circ\text{C}$		5	180	mV
Quiescent Current	$I_q$		25 $^\circ\text{C}$		4.5	8	mA
Quiescent Current Change	$\Delta I_q$	$21\text{V} \leq V_i \leq 33\text{V}$	0-125 $^\circ\text{C}$			1	mA
	$\Delta I_q$	$5\text{mA} \leq I_o \leq 1\text{A}$				0.5	mA
Output voltage drift	$\Delta V_o / \Delta T$	$I_o=5\text{mA}$	0-125 $^\circ\text{C}$		-1		mV/ $^\circ\text{C}$
Output Noise Voltage	$V_N$	$10\text{Hz} \leq f \leq 100\text{KHz}$	25 $^\circ\text{C}$		110		$\mu\text{V}$
Ripple Rejection	RR	$22\text{V} \leq V_i \leq 32\text{V}$ , $f=120\text{Hz}$	0-125 $^\circ\text{C}$	53	69		dB
Dropout Voltage	$V_d$	$I_o=1\text{A}$	25 $^\circ\text{C}$		2		V
Output resistance	$R_o$	$f=1\text{KHz}$	25 $^\circ\text{C}$		22		$\text{m}\Omega$
Short Circuit Current	$I_{sc}$	$V_i=35\text{V}$	25 $^\circ\text{C}$		200		mA
Peak Current	$I_{pk}$		25 $^\circ\text{C}$		2.1		A

### TYPICAL APPLICATION

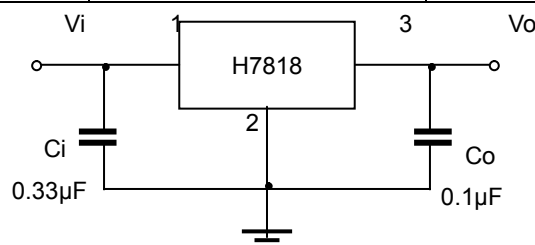

**Typical Characteristics**

**H78XX**

