

TELEVISION SIGNAL PROCESSING CIRCUIT

The TCA270S is a monolithic integrated circuit combining the following functions:

- synchronous demodulator
- video amplifier with buffer output stages
- noise inverters
- A.G.C. detector with output stages for n-p-n tuner and i.f. amplifier
- A.F.C. demodulator with buffer output stage

Opposite polarity video signals are available from emitter followers, the negative-going signal being matched to integrated circuit type TBA920.

QUICK REFERENCE DATA				
Supply voltage	V_{3-16}	nom.	12	V
Ambient temperature	T_{amb}	typ.	25	°C

Frequency	f	typ.	38,9	MHz
Supply current	I_3	typ.	47	mA
Video output voltage (peak value)	V_{9-16M}	typ.	3	V
Bandwidth (3 dB)	B	typ.	5	MHz
Intermodulation products (blue colour bar)				
1, 1 MHz with respect to B-W level		typ.	-60	dB
3, 3 MHz with respect to B-W level		typ.	-67	dB
A.F.C. output control voltage swing (peak-to-peak value)	$V_{11-16(p-p)}$	>	10	V
A.G.C. control current for n-p-n i.f. (pin 4)	I_4	>	10	mA
A.G.C. control current for tuner (pin 5)	I_5	>	10	mA


PACKAGE OUTLINES

TCA270S : 16-lead DIL; plastic (SOT-38).

TCA270SQ: 16-lead QIL; plastic (SOT-58).


TCA270S TCA270SQ

CIRCUIT DIAGRAM

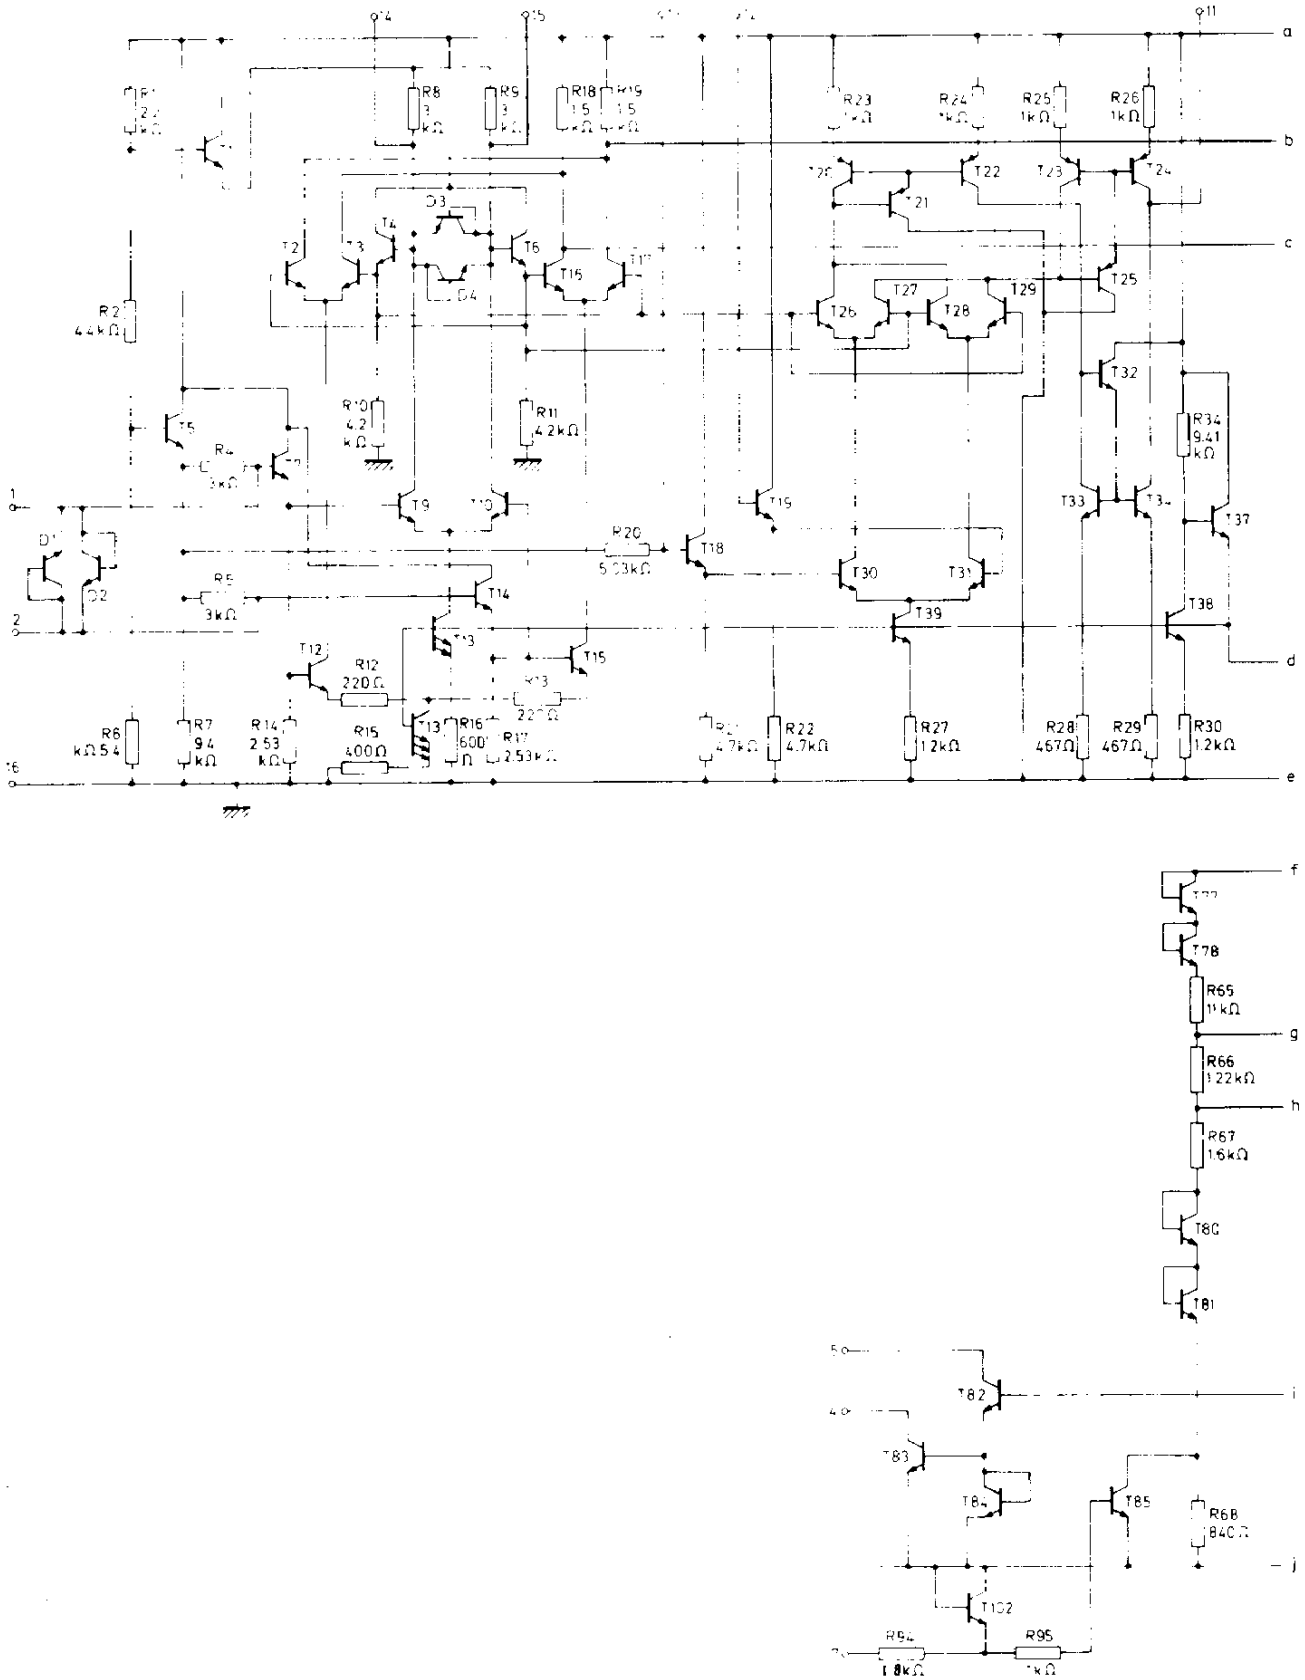

98

CIRCUIT DIAGRAM (continued)

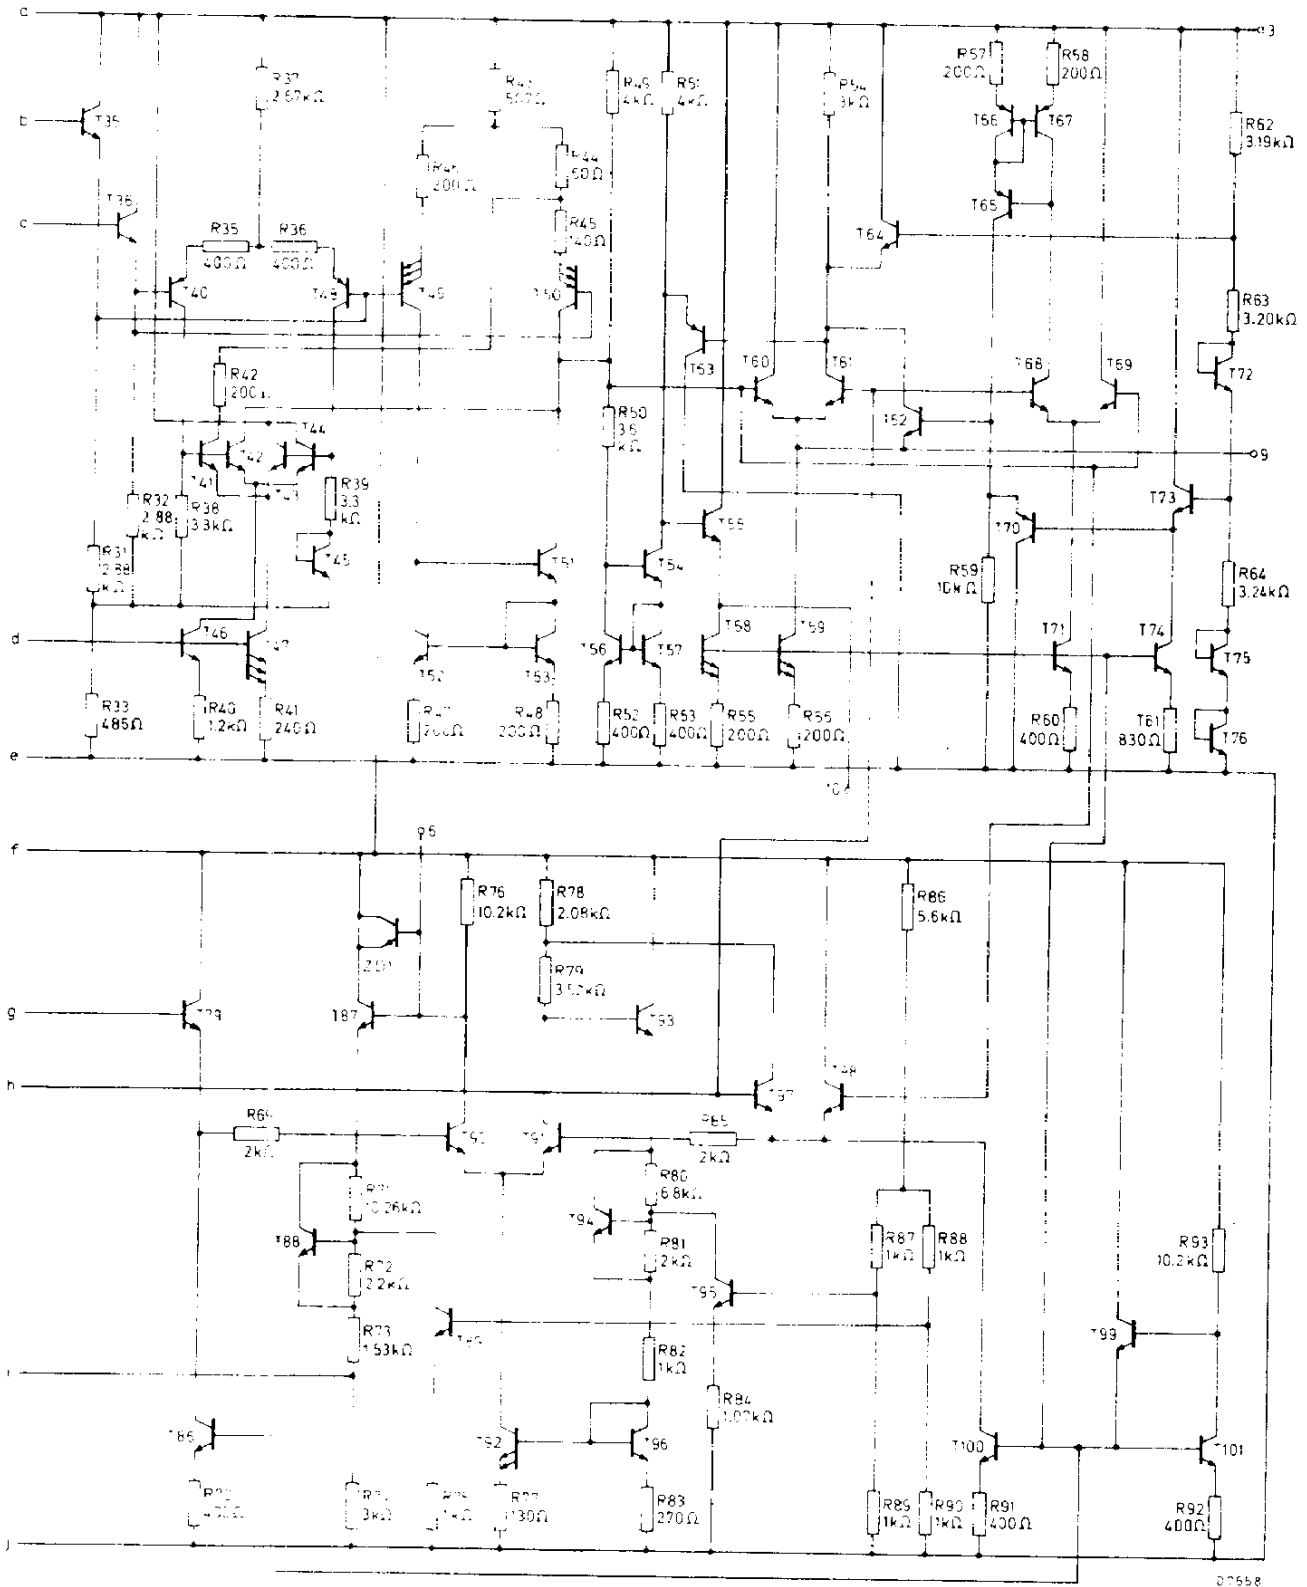

07558

RATINGS Limiting values in accordance with the Absolute Maximum System (IEC134)

<u>Supply voltage</u> during switch on ($t \leq 10$ s)	V_{3-16}	max.	18	V
<u>Power dissipation</u>	P_{tot}	max.	1	W
<u>Temperatures</u>				
Storage temperature	T_{stg}		-55 to +125	$^{\circ}C$
Operating ambient temperature	T_{amb}		-25 to +55	$^{\circ}C$

CHARACTERISTICS

Supply voltage range	V_{3-16}	typ.	12,0	V
			10,2 to 13,8	V
Supply current range	I_3	typ.	47	mA
			33 to 62	mA
D.C. output voltage (zero signal; pin 9)	V_{9-16}	typ.	6	V
D.C. output voltage (zero signal; pin 10)	V_{10-16}	typ.	6	V
D.C. output voltage at start of a.g.c. (pin 9)	V_{9-16}	typ.	3	V
Unbalanced r.m.s. input voltage for a.g.c.	$V_{i(rms)}$	typ.	70	mV
			50 to 100	mV
Input resistance at pin 1	R_{1-16}	typ.	3	$k\Omega$
Input resistance at pin 2	R_{2-16}	typ.	3	$k\Omega$
Bandwidth (3 dB) of video output	B	typ.	5	MHz
Differential gain		<	10	% 1)
Differential phase		<	10	$^{\circ}$ 1)
Intermodulation products (blue colour bar)				
1,1 MHz		typ.	-60	dB
3,3 MHz		typ.	-67	dB
Carrier frequency rejection at pins 9, 10 and 11		>	40	dB
Twice carrier frequency rejection at pins 9, 10 and 11		>	40	dB

1) CCIR system of modulation, peak of white signal = 10% of carrier.

CHARACTERISTICS (continued)

A. G. C. circuit

Saturation voltage of tuner control at 10 mA (pin 4)	$V_{4-13sat}$	<	0,3	V
Saturation voltage of i. f. control at 10 mA (pin 5)	$V_{5-13sat}$		0,7 to 1,2	V
Breakdown voltage at 1 mA (pins 4 and 5)	$V_{(BR)4-13}$ $V_{(BR)5-13}$	>	14	V
Control current at pins 4 and 5	$I_4; I_5$	>	10	mA
Signal expansion for complete a. g. c.		<	0,5	dB
A. G. C. gating (optional) by negative line flyback pulse; input voltage (peak-to-peak value)	$V_{i(p-p)}$	> <	2 supply voltage	V
input resistance	R_i	typ.	1,8	k Ω
Current ratio of unsaturated outputs (pins 4 and 5) at $I_5 = 1$ mA	$\frac{I_4}{I_5}$	>	6	


A. F. C. circuit

Output control voltage swing (peak-to-peak value)	$V_{11-16(p-p)}$	>	10	V
Change of frequency for complete output voltage swing		<	400	kHz
Change of frequency to maintain peak output voltage		>	± 1	MHz

Noise inverters ¹⁾


Negative-going noise pulses in pin 9 inversion threshold		typ.	2,55	V
Positive-going noise pulses in pin 9 inversion threshold		typ.	6,6	V

¹⁾ Noise pulses are inverted to a point near black level.




TCA270S TCA270SQ

APPLICATION INFORMATION

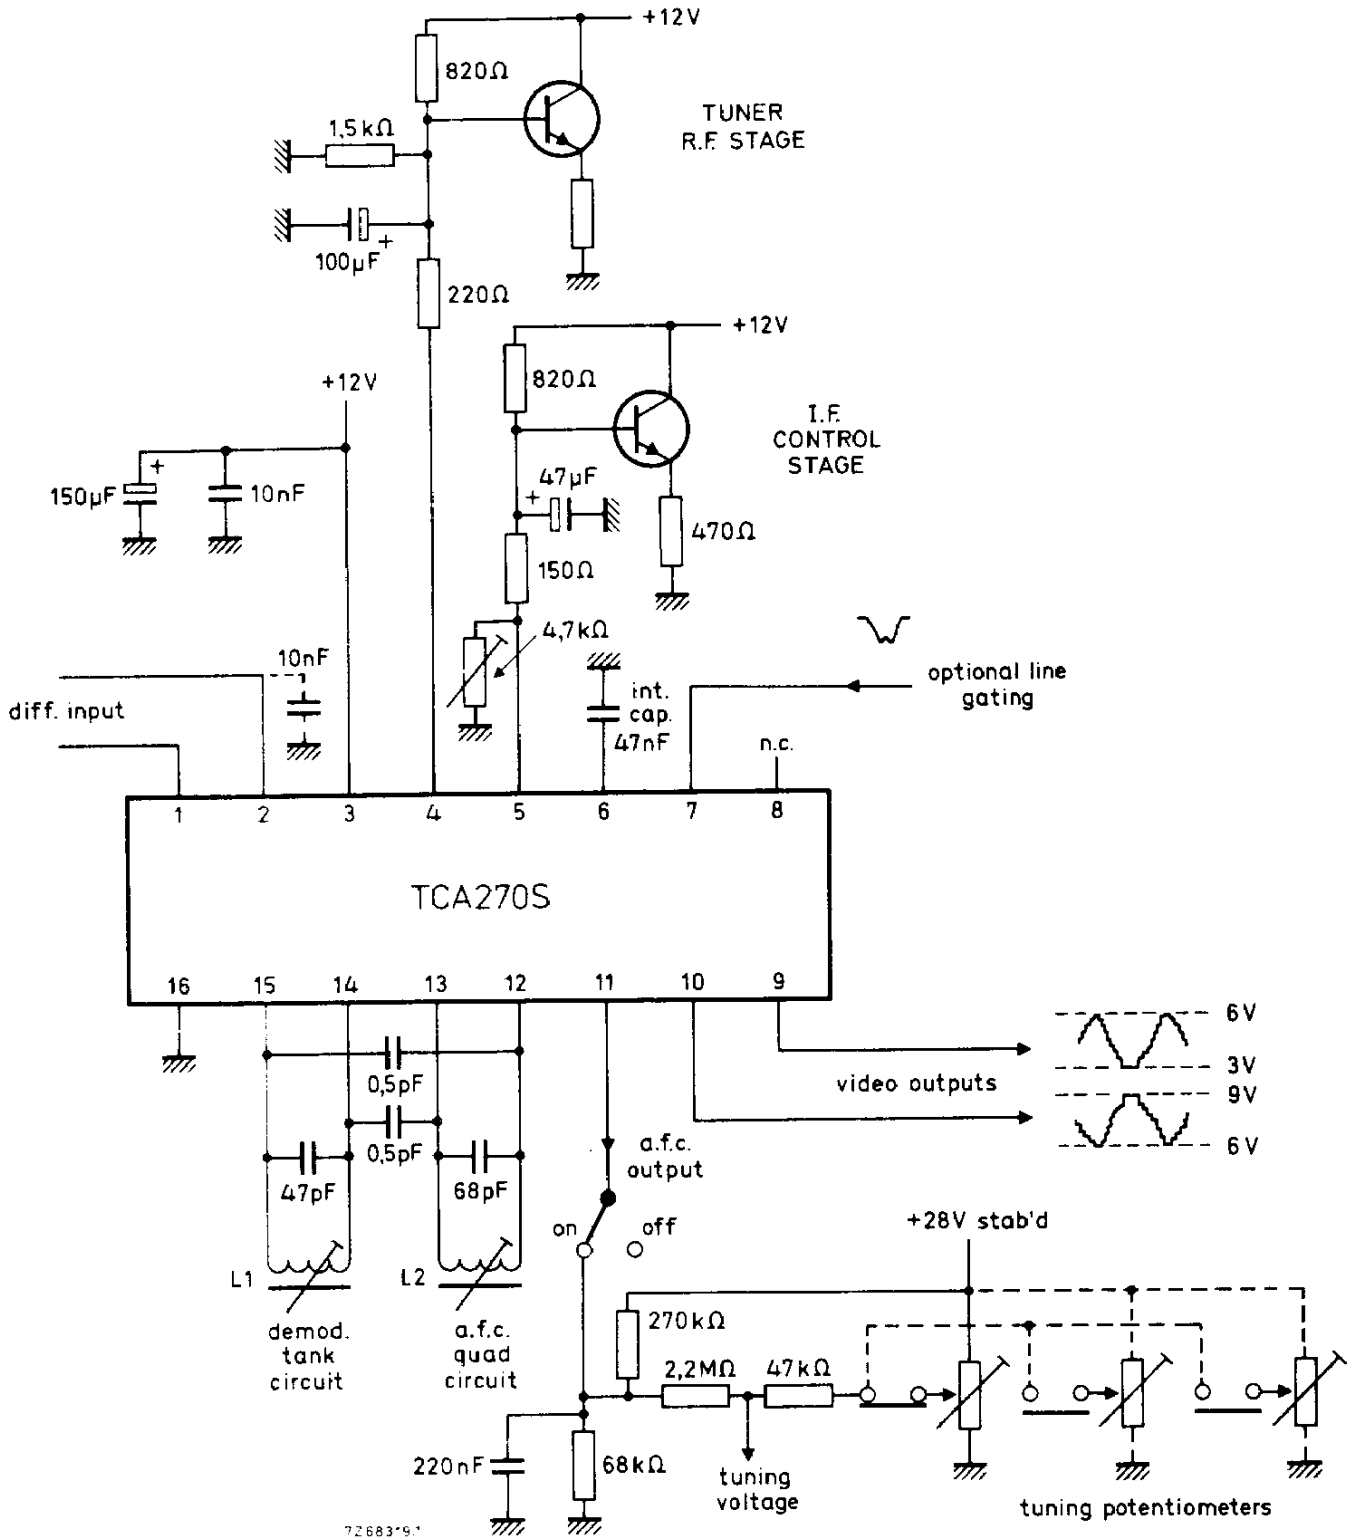

Unloaded Q of L1 and L2 must be > 50.

102

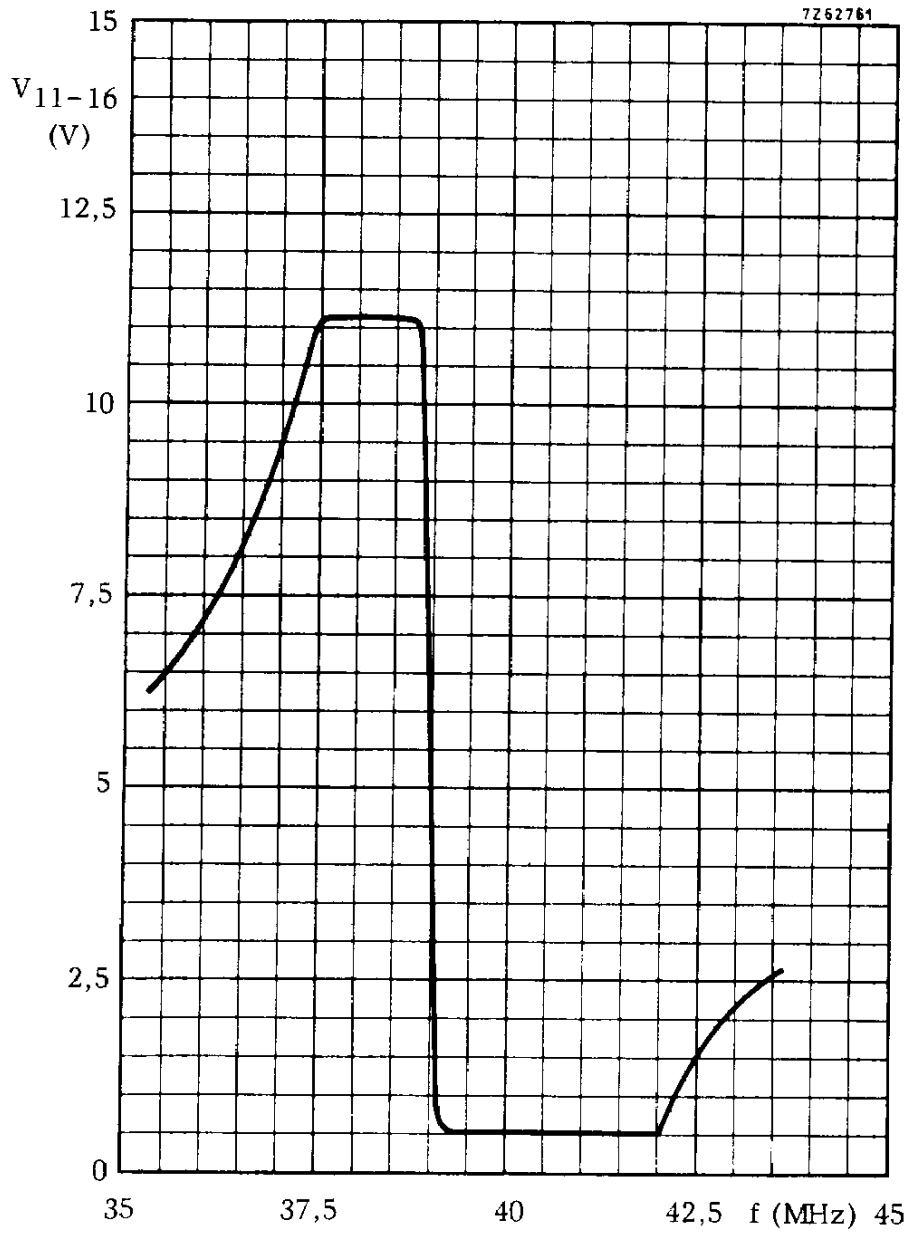

A.F.C. output voltage versus frequency



TCA270S
TCA270SQ

7Z62762.1

