

Silicon NPN Power Transistors

2SC2238 2SC2238A 2SC2238B

DESCRIPTION

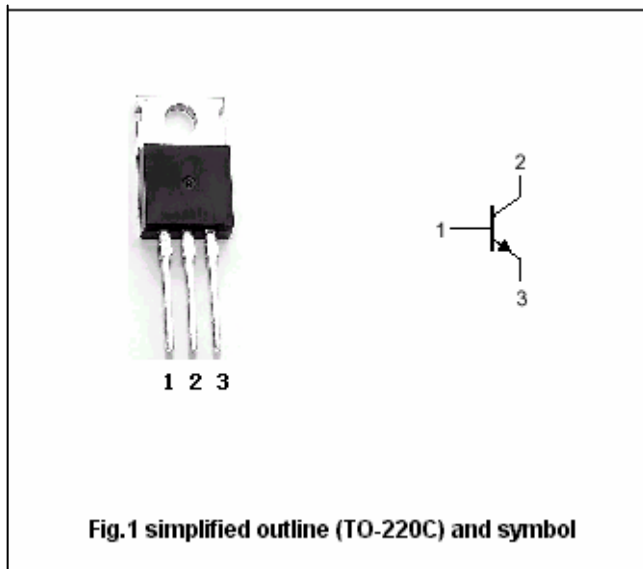
- With TO-220 package
- Complement to type 2SA968
- High breakdown voltage

APPLICATIONS

- Power amplifier applications
- Driver stage amplifier applications

PINNING

PIN	DESCRIPTION
1	Base
2	Collector;connected to mounting base
3	Emitter

Absolute maximum ratings($T_a=25^{\circ}\text{C}$)

SYMBOL	PARAMETER		CONDITIONS	VALUE	UNIT
V_{CBO}	Collector-base voltage	2SC2238	Open emitter	160	V
		2SC2238A		180	
		2SC2238B		200	
V_{CEO}	Collector-emitter voltage	2SC2238	Open base	160	V
		2SC2238A		180	
		2SC2238B		200	
V_{EBO}	Emitter-base voltage		Open collector	5	V
I_C	Collector current			1.5	A
I_E	Emitter current			-1.5	A
P_T	Total power dissipation		$T_C=25^{\circ}\text{C}$	25	W
T_j	Junction temperature			150	$^{\circ}\text{C}$
T_{stg}	Storage temperature			-55~150	$^{\circ}\text{C}$

Silicon NPN Power Transistors

2SC2238 2SC2238A 2SC2238B

CHARACTERISTICS

Tj=25°C unless otherwise specified

SYMBOL	PARAMETER		CONDITIONS	MIN	TYP.	MAX	UNIT
$V_{(BR)CEO}$	Collector-emitter breakdown voltage	2SC2238	$I_C=10mA; I_B=0$	160			V
		2SC2238A		180			
		2SC2238B		200			
$V_{(BR)EBO}$	Emitter-base breakdown voltage		$I_E=1mA; I_C=0$	5			V
V_{CEsat}	Collector-emitter saturation voltage		$I_C=500mA; I_B=50mA$			1.5	V
V_{BE}	Base-emitter on voltage		$I_C=500mA; V_{CE}=5V$			1.0	V
I_{CBO}	Collector cut-off current		$V_{CB}=160V; I_E=0$			1.0	μA
I_{EBO}	Emitter cut-off current		$V_{EB}=5V; I_C=0$			1.0	μA
h_{FE}	DC current gain		$I_C=100mA; V_{CE}=5V$	70		240	
C_{ob}	Output capacitance		$I_E=0; V_{CB}=10V, f=1MHz$		25		pF
f_T	Transition frequency		$I_C=100mA; V_{CE}=10V$		100		MHz

◆ h_{FE} Classifications

O	Y
70-140	120-240

Silicon NPN Power Transistors 2SC2238 2SC2238A 2SC2238B

PACKAGE OUTLINE

