

2SD1262, 2SD1262A

Silicon NPN triple diffusion planar type Darlington


For medium speed power switching
Complementary to 2SB939 and 2SB939A

Features

- High forward current transfer ratio h_{FE}
- High-speed switching
- N type package enabling direct soldering of the radiating fin to the printed circuit board, etc. of small electronic equipment.

Absolute Maximum Ratings ($T_C=25^\circ C$)

Parameter	Symbol	Ratings	Unit
Collector to base voltage	V_{CBO}	2SD1262: 60	V
2SD1262A: 80			
Collector to emitter voltage	V_{CEO}	2SD1262: 60	V
2SD1262A: 80			
Emitter to base voltage	V_{EBO}	7	V
Peak collector current	I_{CP}	12	A
Collector current	I_C	8	A
Collector power dissipation	P_C	$T_C=25^\circ C$: 45	W
$T_a=25^\circ C$: 1.3			
Junction temperature	T_j	150	$^\circ C$
Storage temperature	T_{stg}	-55 to +150	$^\circ C$

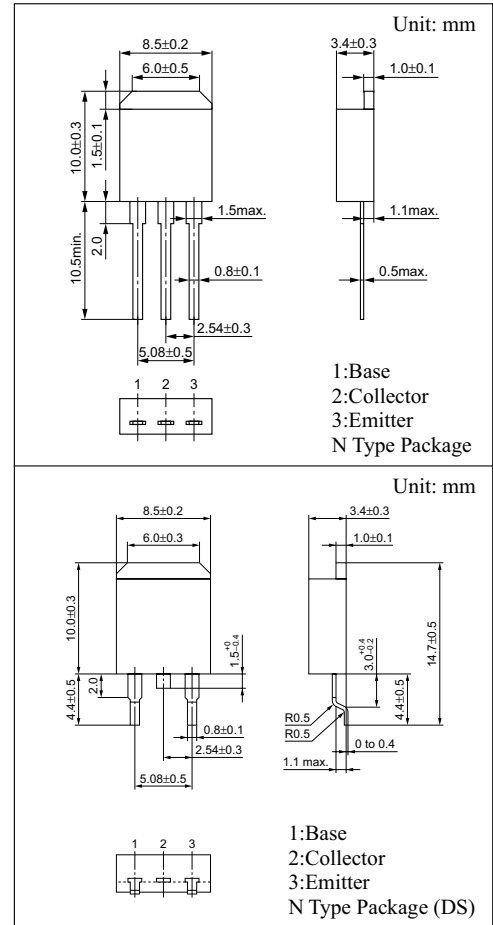

Electrical Characteristics ($T_C=25^\circ C$)

Parameter	Symbol	Conditions	min	typ	max	Unit
Collector cutoff current	I_{CBO}	$V_{CB} = 60V, I_E = 0$			100	μA
		$V_{CB} = 80V, I_E = 0$			100	
Emitter cutoff current	I_{EBO}	$V_{EB} = 7V, I_C = 0$			2	mA
Collector to emitter voltage	V_{CEO}	$I_C = 30mA, I_B = 0$	60			V
			80			
Forward current transfer ratio	h_{FE1}^*	$V_{CE} = 3V, I_C = 4A$	1000		10000	
	h_{FE2}	$V_{CE} = 3V, I_C = 8A$	500			
Collector to emitter saturation voltage	$V_{CE(sat)}$	$I_C = 4A, I_B = 8mA$			1.5	V
Base to emitter saturation voltage	$V_{BE(sat)}$	$I_C = 4A, I_B = 8mA$			2	V
Transition frequency	f_T	$V_{CE} = 10V, I_C = 0.5A, f = 1MHz$		20		MHz
Turn-on time	t_{on}	$I_C = 4A, I_{B1} = 8mA, I_{B2} = -8mA, V_{CC} = 50V$		0.5		μs
Storage time	t_{stg}		4		μs	
Fall time	t_f		1		μs	

* h_{FE1} Rank classification

Rank	R	Q	P
h_{FE1}	1000 to 2500	2000 to 5000	4000 to 10000

Internal Connection

