

isc Silicon PNP Darlington Power Transistor


2SB1342

DESCRIPTION

- Collector-Emitter Breakdown Voltage-
: $V_{(BR)CEO} = -80V(\text{Min})$
- High DC Current Gain-
: $h_{FE} = 1000(\text{Min}) @ (V_{CE} = -3V, I_C = -2A)$
- Complement to Type 2SD1933


APPLICATIONS

- Designed for power amplifier applications.

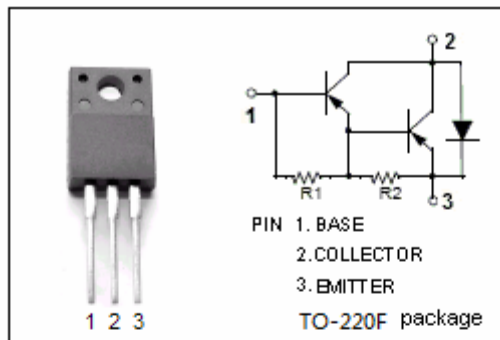

ABSOLUTE MAXIMUM RATINGS($T_a=25^{\circ}C$)

SYMBOL	PARAMETER	VALUE	UNIT
V_{CBO}	Collector-Base Voltage	-80	V
V_{CEO}	Collector-Emitter Voltage	-80	V
V_{EBO}	Emitter-Base Voltage	-7	V
I_C	Collector Current-Continuous	-4	A
I_{CM}	Collector Current-Peak	-6	A
P_C	Collector Power Dissipation @ $T_a=25^{\circ}C$	2	W
	Collector Power Dissipation @ $T_C=25^{\circ}C$	30	
T_J	Junction Temperature	150	$^{\circ}C$
T_{stg}	Storage Temperature	-55~150	$^{\circ}C$

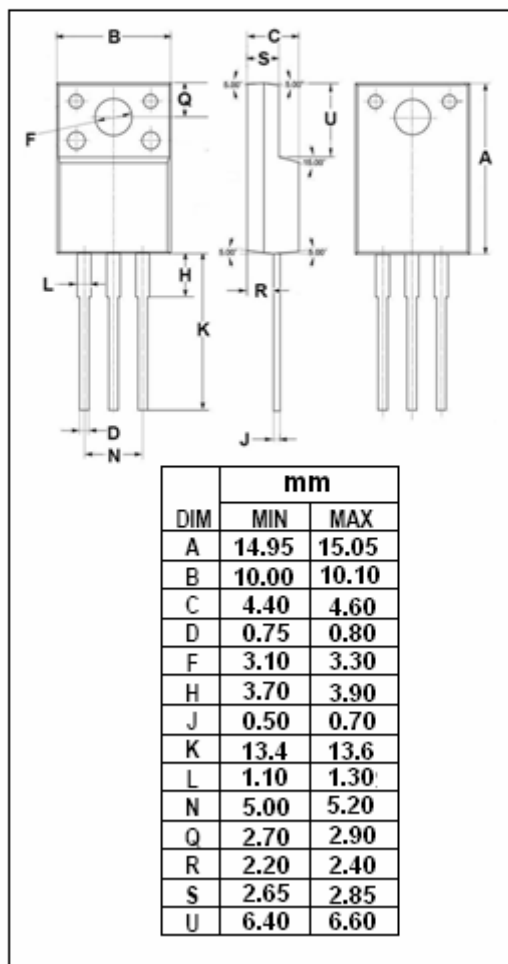

isc Silicon PNP Darlington Power Transistor**2SB1342****ELECTRICAL CHARACTERISTICS**T_j=25°C unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP.	MAX	UNIT
V _{(BR)CEO}	Collector-Emitter Breakdown Voltage	I _C = -1mA; I _B = 0	-80			V
V _{(BR)CBO}	Collector-Base Breakdown Voltage	I _C = -50 μ A; I _E = 0	-80			V
V _{CE(sat)}	Collector-Emitter Saturation Voltage	I _C = -2A; I _B = -4mA			-1.5	V
I _{CBO}	Collector Cutoff Current	V _{CB} = -80V ; I _E = 0			-100	μ A
I _{EBO}	Emitter Cutoff Current	V _{EB} = -5V; I _C = 0			-3	mA
h _{FE}	DC Current Gain	I _C = -2A ; V _{CE} = -3V	1000		10000	
C _{OB}	Output Capacitance	I _E = 0; V _{CB} = -10V; f _{test} = 1MHz		45		pF
f _T	Current-Gain—Bandwidth Product	I _E = 0.5A ; V _{CE} = -5V; f _{test} = 10MHz		12		MHz