

H11D1X, H11D2X, H11D3X, H11D4X  
H11D1, H11D2, H11D3, H11D4



**HIGH VOLTAGE OPTICALLY  
COUPLED ISOLATOR  
PHOTOTRANSISTOR OUTPUT**

**'X' SPECIFICATION APPROVALS**

- VDE 0884 in 3 available lead forms :-  
- STD  
- G form  
- SMD approved to CECC 00802

**DESCRIPTION**


The H11D series of optically coupled isolators consist of infrared light emitting diode and NPN silicon photo transistor in a standard 6 pin dual in line plastic package.

**FEATURES**

- Options :-  
10mm lead spread - add G after part no.  
Surface mount - add SM after part no.  
Tape&reel - add SMT&R after part no.
- High Isolation Voltage (5.3kV<sub>RMS</sub>, 7.5kV<sub>PK</sub>)
- High BV<sub>CER</sub> (300V - H11D1, H11D2)  
(200V - H11D3, H11D4)
- All electrical parameters 100% tested
- Custom electrical selections available

**APPLICATIONS**

- DC motor controllers
- Industrial systems controllers
- Measuring instruments
- Signal transmission between systems of different potentials and impedances

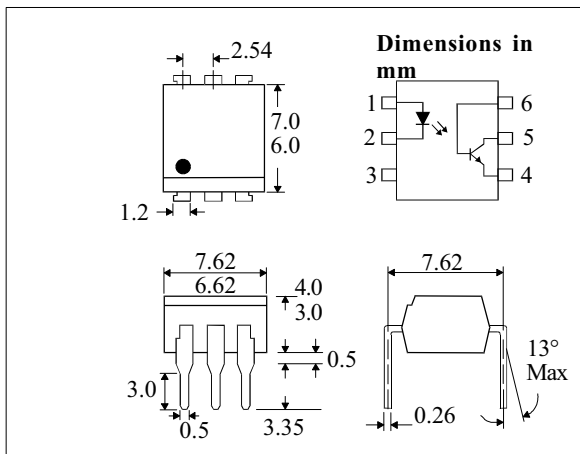

**ABSOLUTE MAXIMUM RATINGS  
(25°C unless otherwise specified)**

Storage Temperature \_\_\_\_\_ -55°C to + 150°C  
Operating Temperature \_\_\_\_\_ -55°C to + 100°C  
Lead Soldering Temperature  
(1/16 inch (1.6mm) from case for 10 secs) 260°C

**INPUT DIODE**


Forward Current \_\_\_\_\_ 60mA  
Reverse Voltage \_\_\_\_\_ 6V  
Power Dissipation \_\_\_\_\_ 100mW

**OUTPUT TRANSISTOR**

Collector-emitter Voltage BV<sub>CER</sub> (R<sub>BE</sub> = 1MΩ )  
H11D1, H11D2 \_\_\_\_\_ 300V  
H11D3, H11D4 \_\_\_\_\_ 200V  
Collector-base Voltage BV<sub>CBO</sub>  
H11D1, H11D2 \_\_\_\_\_ 300V  
H11D3, H11D4 \_\_\_\_\_ 200V  
Emitter-collector Voltage BV<sub>ECO</sub> \_\_\_\_\_ 6V  
Power Dissipation \_\_\_\_\_ 150mW

**POWER DISSIPATION**

Total Power Dissipation \_\_\_\_\_ 250mW  
(derate linearly 2.67mW/°C above 25°C)

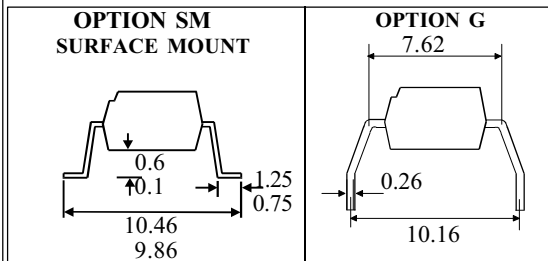

**ISOCOM COMPONENTS LTD**  
Unit 25B, Park View Road West,  
Park View Industrial Estate, Brenda Road  
Hartlepool, TS25 1YD England Tel: (01429)863609  
Fax: (01429) 863581 e-mail sales@isocom.co.uk  
http://www.isocom.com

**ISOCOM INC**  
1024 S. Greenville Ave, Suite 240,  
Allen, TX 75002 USA  
Tel: (214)495-0755 Fax: (214)495-0901  
e-mail info@isocom.com  
http://www.isocom.com

**ELECTRICAL CHARACTERISTICS (  $T_A = 25^\circ\text{C}$  Unless otherwise noted )**

PARAMETER		MIN	TYP	MAX	UNITS	TEST CONDITION
Input	Forward Voltage ( $V_F$ )		1.2	1.5	V	$I_F = 10\text{mA}$
	Reverse Current ( $I_R$ )			10	$\mu\text{A}$	$V_R = 6\text{V}$
Output	Collector-emitter Breakdown ( $BV_{\text{CER}}$ ) H11D1, H11D2	300			V	$I_C = 1\text{mA}, R_{\text{BE}} = 1\text{M}\Omega$ ( note 2 )
	H11D3, H11D4	200			V	
	Collector-base Breakdown ( $BV_{\text{CBO}}$ ) H11D1, H11D2	300			V	$I_C = 100\mu\text{A}$
	H11D3, H11D4	200			V	
	Emitter-collector Breakdown ( $BV_{\text{ECO}}$ )	6			V	$I_E = 100\mu\text{A}$
	Collector-emitter Dark Current ( $I_{\text{CER}}$ ) H11D1, H11D2				100 250	nA $\mu\text{A}$
H11D3, H11D4				100 250	nA $\mu\text{A}$	
Coupled	Current Transfer Ratio (CTR)	20			%	$10\text{mA } I_F, 10\text{V } V_{\text{CE}},$ $R_{\text{BE}} = 1\text{M}\Omega$ $10\text{mA } I_F, 0.5\text{mA } I_C,$ $R_{\text{BE}} = 1\text{M}\Omega$ See note 1 See note 1 $V_{\text{IO}} = 500\text{V}$ (note 1) $V_{\text{CC}} = 10\text{V}, I_C = 2\text{mA},$ $R_L = 100\Omega, \text{ fig 1}$
	Collector-emitter Saturation Voltage $V_{\text{CE(SAT)}}$			0.4	V	
	Input to Output Isolation Voltage $V_{\text{ISO}}$	5300 7500			$V_{\text{RMS}}$ $V_{\text{PK}}$	
	Input-output Isolation Resistance $R_{\text{ISO}}$	$5 \times 10^{10}$			$\Omega$	
	Turn-on Time $t_{\text{on}}$ Turn-off Time $t_{\text{off}}$		5 5		$\mu\text{s}$ $\mu\text{s}$	

Note 1 Measured with input leads shorted together and output leads shorted together.  
 Note 2 Special Selections are available on request. Please consult the factory.



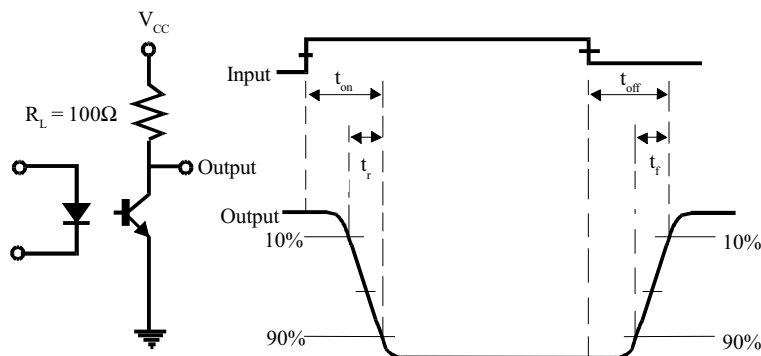


FIG 1


**Collector Power Dissipation vs. Ambient Temperature**

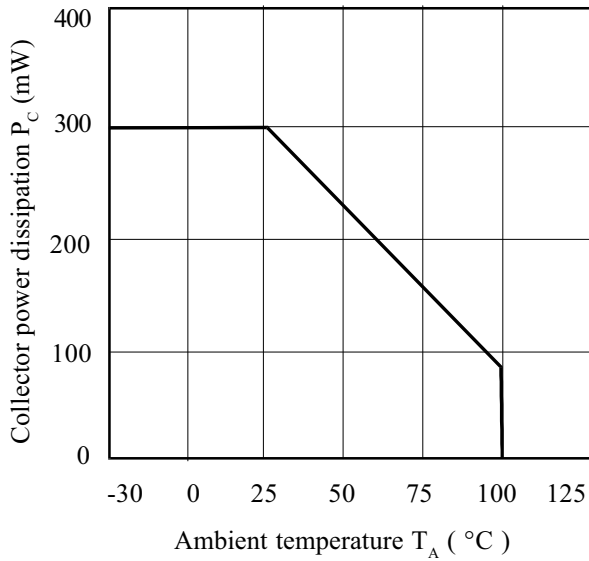


**Relative Current Transfer Ratio vs. Forward Current (normalised to 10mA  $I_F$ )**

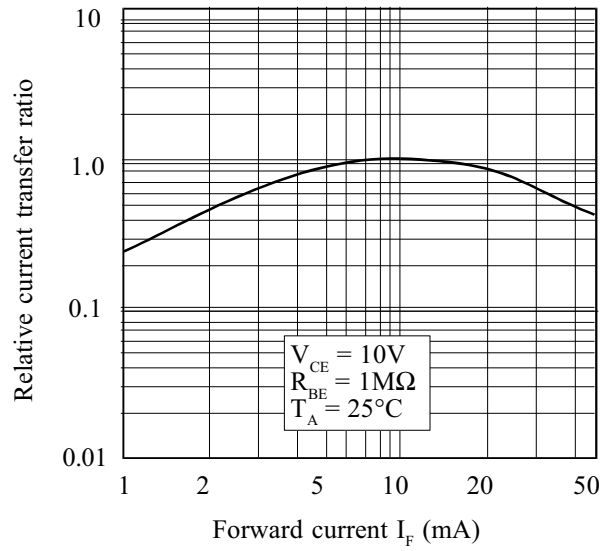


**Forward Current vs. Ambient Temperature**

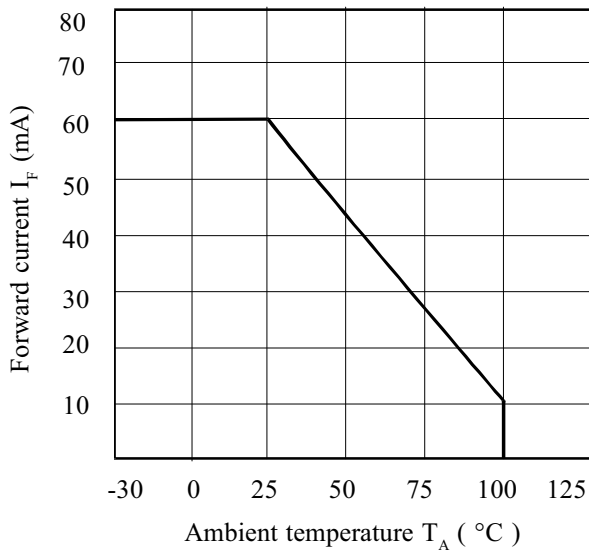

**Relative Current Transfer Ratio vs. Ambient Temperature**

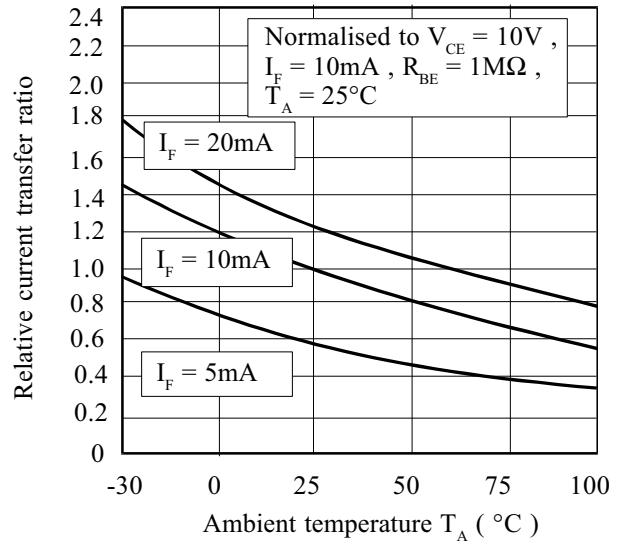

**Forward Voltage vs. Forward Current**

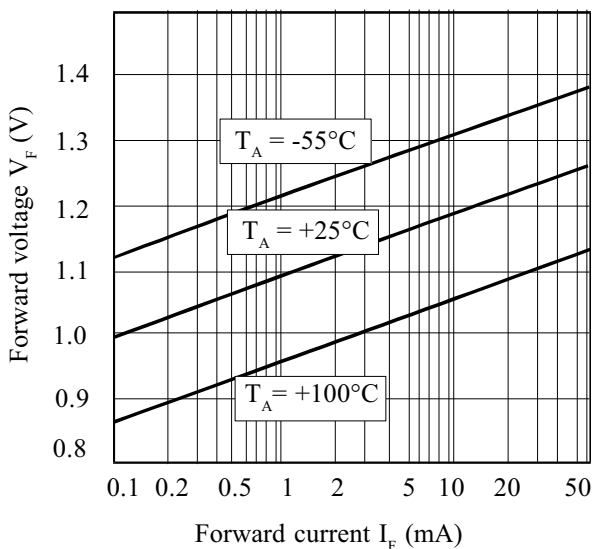

**Collector-base Current vs. Ambient Temperature**

