

Silicon NPN Power Transistors

MJ1000/1001

DESCRIPTION


- With TO-3 package
- DARLINGTON
- High DC current gain
- Complement to type MJ900/901

APPLICATIONS

- For use as output devices in complementary general purpose amplifier applications

PINNING(see Fig.2)

PIN	DESCRIPTION
1	Base
2	Emitter
3	Collector

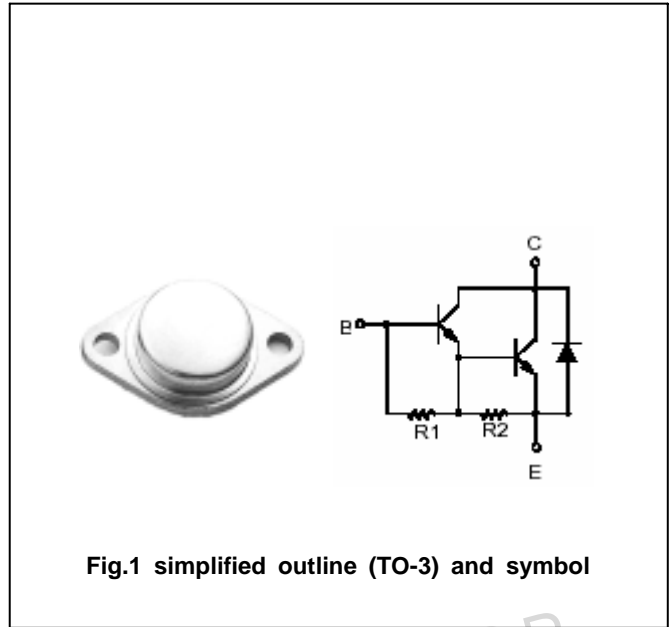

Absolute maximum ratings(Ta=)

SYMBOL	PARAMETER	CONDITIONS	VALUE	UNIT
V _{CBO}	Collector-base voltage	MJ1000	60	V
		MJ1001	80	
V _{CEO}	Collector-emitter voltage	MJ1000	60	V
		MJ1001	80	
V _{EBO}	Emitter-base voltage	Open collector	5	V
I _C	Collector current		10	A
I _B	Base current		0.1	A
P _D	Total power dissipation	T _C =25	90	W
T _j	Junction temperature		200	
T _{stg}	Storage temperature		-55~200	

Silicon NPN Power Transistors

MJ1000/1001

CHARACTERISTICS

T_j=25 unless otherwise specified

SYMBOL	PARAMETER		CONDITIONS	MIN	TYP.	MAX	UNIT
V _{(BR)CEO}	Collector-emitter breakdown voltage	MJ1000	I _C =0.1A ; I _B =0	60			V
		MJ1001		80			
V _{CEsat-1}	Collector-emitter saturation voltage		I _C =3A; I _B =12mA			2.0	V
V _{CEsat-2}	Collector-emitter saturation voltage		I _C =8A; I _B =40mA			4.0	V
V _{BE}	Base-emitter on voltage		I _C =3A ; V _{CE} =3V			2.5	V
I _{CER}	Collector cut-off current	MJ1000	V _{CE} =60V; R _{BE} =1.0k T _C =150			1.0 5.0	mA
		MJ1001	V _{CE} =80V; R _{BE} =1.0k T _C =150			1.0 5.0	
I _{CEO}	Collector cut-off current	MJ1000	V _{CE} =30V; I _B =0			0.5	mA
		MJ1001	V _{CE} =40V; I _B =0				
I _{EBO}	Emitter cut-off current		V _{EB} =5V; I _C =0			2.0	mA
h _{FE-1}	DC current gain		I _C =3A ; V _{CE} =3V	1000			
h _{FE-2}	DC current gain		I _C =4A ; V _{CE} =3V	750			

THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	MAX	UNIT
R _{th j-c}	Thermal resistance junction to case	1.94	/W

