

Silicon NPN Power Transistors

BUV27A

DESCRIPTION

- With TO-220C package
- Low collector saturation voltage
- Fast switching speed

APPLICATIONS

- For use in high frequency and efficiency converters,switching regulators and motor control

PINNING

PIN	DESCRIPTION
1	Base
2	Collector;connected to mounting base
3	Emitter

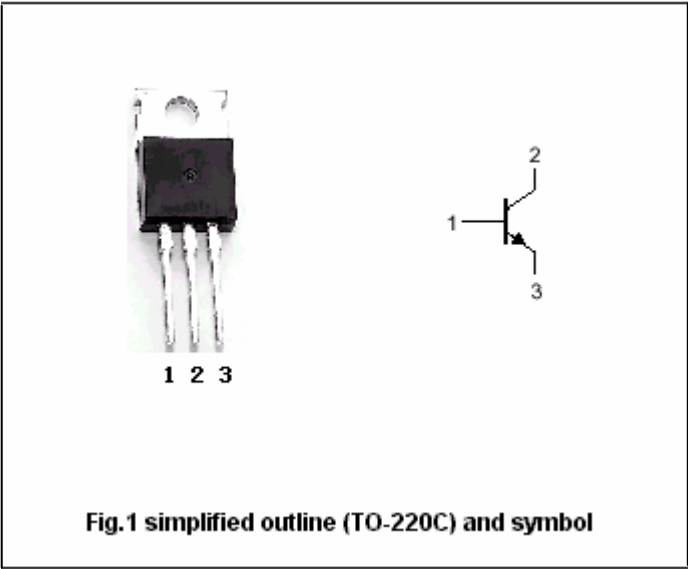


Fig.1 simplified outline (TO-220C) and symbol

Absolute maximum ratings (Tc=25)

SYMBOL	PARAMETER	CONDITIONS	VALUE	UNIT
V_{CBO}	Collector-base voltage	Open emitter	300	V
V_{CEO}	Collector-emitter voltage	Open base	150	V
V_{EBO}	Emitter-base voltage	Open collector	7	V
I_C	Collector current (DC)		12	A
I_{CM}	Collector current (peak)		20	A
I_B	Base current		4	A
I_{BM}	Base current (peak)		6	A
P_{tot}	Total power dissipation	$T_C=25$	85	W
T_j	Max.operating junction temperature		175	
T_{stg}	Storage temperature		-65~175	

THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	MAX	UNIT
$R_{th\ j-case}$	Thermal resistance junction case	1.76	/W

Silicon NPN Power Transistors

BUV27A

CHARACTERISTICS

T_j=25 unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP.	MAX	UNIT
V _{CEQ(SUS)}	Collector-emitter sustaining voltage	I _C =0.2 A ; I _B =0; L=25mH	150			V
V _{(BR)EBO}	Emitter-base breakdown voltage	I _E =50mA; I _C =0	7		30	V
V _{CEsat-1}	Collector-emitter saturation voltage	I _C =4A ; I _B =0.4 A			0.7	V
V _{CEsat-2}	Collector-emitter saturation voltage	I _C =7A; I _B =0.7A			1.5	V
V _{BEsat}	Base-emitter saturation voltage	I _C =7A; I _B =0.7A			2	V
I _{CEX}	Collector cut-off current	V _{CE} =300V; V _{BE} = -1.5 V T _C =125			1	mA
I _{EBO}	Emitter cut-off current	V _{EB} =5V; I _C =0			1	mA

Silicon NPN Power Transistors

BUV27A

PACKAGE OUTLINE

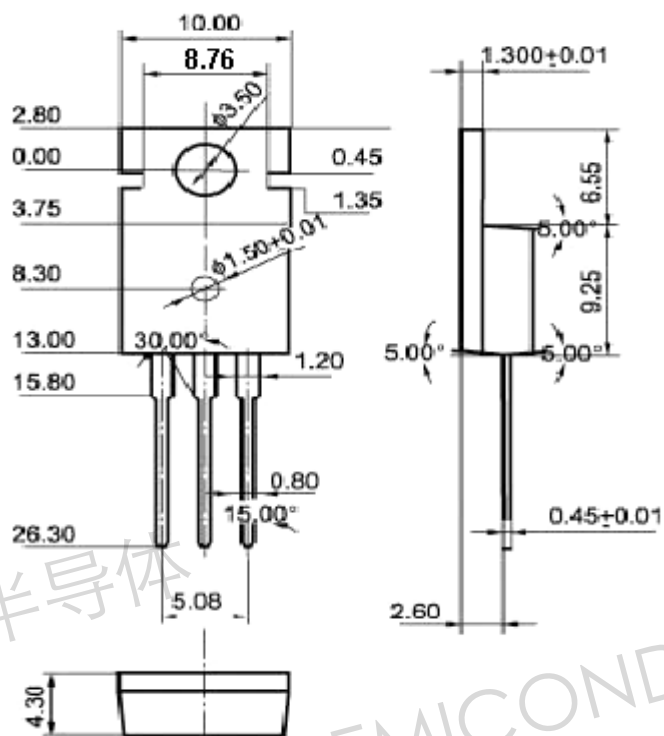


Fig.2 Outline dimensions (unindicated tolerance: 0.1mm)