

Silicon NPN Power Transistors

BU922

DESCRIPTION

- With TO-3 package
- High current;high voltage
- DARLINGTON

APPLICATIONS

- Designed for automotive ignition applications and inverter circuits for motor control.

PINNING(see fig.2)

PIN	DESCRIPTION
1	Base
2	Emitter
3	Collector

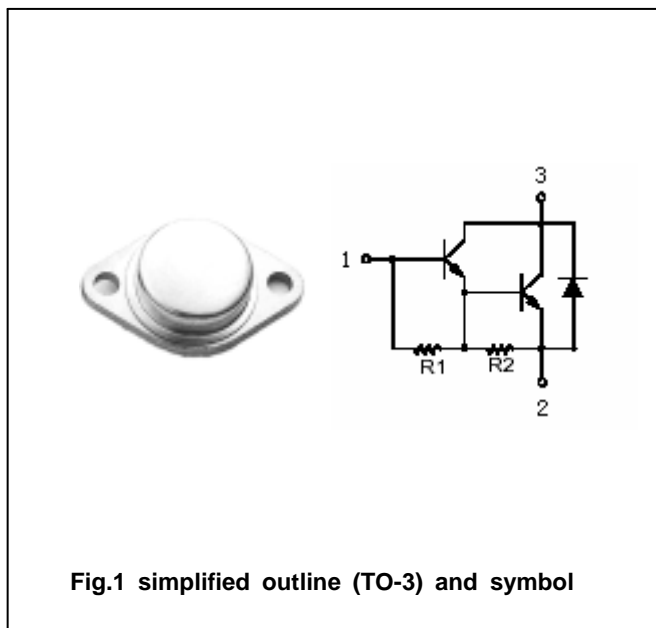


Fig.1 simplified outline (TO-3) and symbol

Absolute maximum ratings (Tc=25 )

SYMBOL	PARAMETER	CONDITIONS	VALUE	UNIT
$V_{CBO}$	Collector-base voltage	Open emitter	500	V
$V_{CEO}$	Collector-emitter voltage	Open base	450	V
$V_{EBO}$	Emitter-base voltage	Open collector	5	V
$I_C$	Collector current		10	A
$I_{CM}$	Collector current-peak		15	A
$I_B$	Base current		5	A
$P_T$	Total power dissipation	$T_c=25$	120	W
$T_j$	Junction temperature		175	
$T_{stg}$	Storage temperature		-65~175	

THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	MAX	UNIT
$R_{th\ j-c}$	Thermal resistance junction to case	1.25	/W

## Silicon NPN Power Transistors

## BU922

## CHARACTERISTICS

T<sub>j</sub>=25 unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP.	MAX	UNIT
V <sub>CEQ(SUS)</sub>	Collector-emitter sustaining voltage	I <sub>C</sub> =0.1A; I <sub>B</sub> =0	450			V
V <sub>CEsat-1</sub>	Collector-emitter saturation voltage	I <sub>C</sub> =5A; I <sub>B</sub> =50mA			1.8	V
V <sub>CEsat-2</sub>	Collector-emitter saturation voltage	I <sub>C</sub> =7 A; I <sub>B</sub> =140mA			1.8	V
V <sub>BEsat-1</sub>	Base-emitter saturation voltage	I <sub>C</sub> =5A; I <sub>B</sub> =50mA			2.2	V
V <sub>BEsat-2</sub>	Base-emitter saturation voltage	I <sub>C</sub> =7 A; I <sub>B</sub> =140mA			2.5	V
I <sub>CES</sub>	Collector cut-off current	V <sub>CE</sub> =500V; V <sub>BE</sub> =0 T <sub>C</sub> =150			0.25 0.50	mA
I <sub>CEO</sub>	Collector cut-off current	V <sub>CE</sub> =450V; I <sub>B</sub> =0			0.25	mA
I <sub>EBO</sub>	Emitter cut-off current	V <sub>EB</sub> =5V; I <sub>C</sub> =0			50	mA
h <sub>FE</sub>	DC current gain	I <sub>C</sub> =2A; V <sub>EB</sub> =2V	500			
V <sub>F</sub>	Diode forward voltage	I <sub>F</sub> =7A			2.5	V

PACKAGE OUTLINE

