

Silicon PNP Power Transistors

MJ2500/2501

DESCRIPTION

- With TO-3 package
- DARLINGTON
- High DC current gain
- Complement to type MJ3000/3001

APPLICATIONS

- For use as output devices in complementary general purpose amplifier applications

PINNING(see Fig.2)

PIN	DESCRIPTION
1	Base
2	Emitter
3	Collector

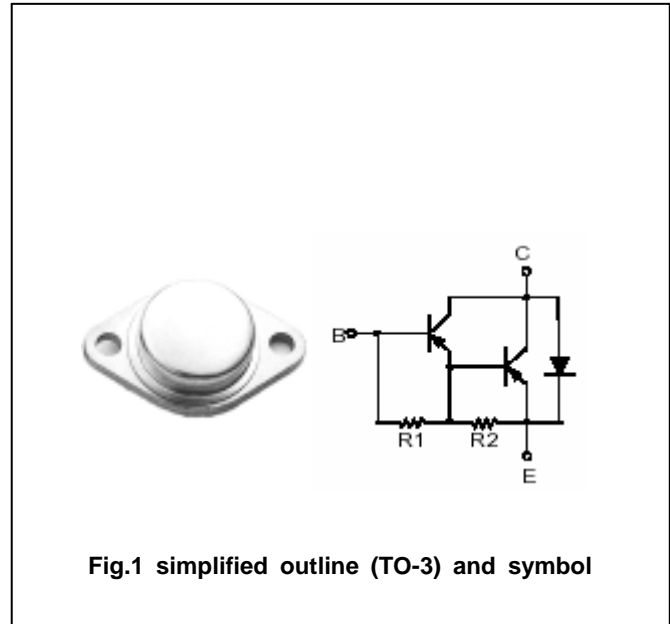


Fig.1 simplified outline (TO-3) and symbol

Absolute maximum ratings(Ta=)

SYMBOL	PARAMETER	CONDITIONS	VALUE	UNIT
V _{CBO}	Collector-base voltage	MJ2500	-60	V
		MJ2501	-80	
V _{CEO}	Collector-emitter voltage	MJ2500	-60	V
		MJ2501	-80	
V _{EBO}	Emitter-base voltage	Open collector	-5	V
I _C	Collector current		-10	A
I _B	Base current		-0.2	A
P _D	Total power dissipation	T _C =25	150	W
T _j	Junction temperature		200	
T _{stg}	Storage temperature		-55~200	

Silicon PNP Power Transistors

MJ2500/2501

CHARACTERISTICS

T_j=25 unless otherwise specified

SYMBOL	PARAMETER		CONDITIONS	MIN	TYP.	MAX	UNIT
V _{(BR)CEO}	Collector-emitter breakdown voltage	MJ2500	I _C =-0.1A ; I _B =0	-60			V
		MJ2501		-80			
V _{CEsat-1}	Collector-emitter saturation voltage		I _C =-5A; I _B =-20mA			-2.0	V
V _{CEsat-2}	Collector-emitter saturation voltage		I _C =-10A; I _B =-50mA			-4.0	V
V _{BE}	Base-emitter on voltage		I _C =-5A ; V _{CE} =-3V			-3.0	V
I _{CER}	Collector cut-off current	MJ2500	V _{CE} =-60V; R _{BE} =1.0k T _C =150			1.0 5.0	mA
		MJ2501	V _{CE} =-80V; R _{BE} =1.0k T _C =150			1.0 5.0	
I _{CEO}	Collector cut-off current	MJ2500	V _{CE} =-30V; I _B =0			-1.0	mA
		MJ2501	V _{CE} =-40V; I _B =0				
I _{EBO}	Emitter cut-off current		V _{EB} =-5V; I _C =0			-2.0	mA
h _{FE}	DC current gain		I _C =-5A ; V _{CE} =-3V	1000			

THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	MAX	UNIT
R _{th j-c}	Thermal resistance junction to case	1.17	/W

PACKAGE OUTLINE

